

IES Report




DoubleBox™ | 107 | Wide Batwing, up | 40° Symmetric, down | 80 CRI | LO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-35-G1S1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	71	73	75	75
Total Lumens, 4' rail length (1219mm)	1944	2005	2046	2046
Lumens per foot (305mm)	486	501	512	512
Lumens per foot UP (305mm)	371	383	391	391
Lumens per foot DOWN (305mm)	115	118	121	121
Input Power (W), 4' rail length (1219mm)	27.6	27.6	27.6	27.6
Watts per foot (305mm)	6.9	6.9	6.9	6.9
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

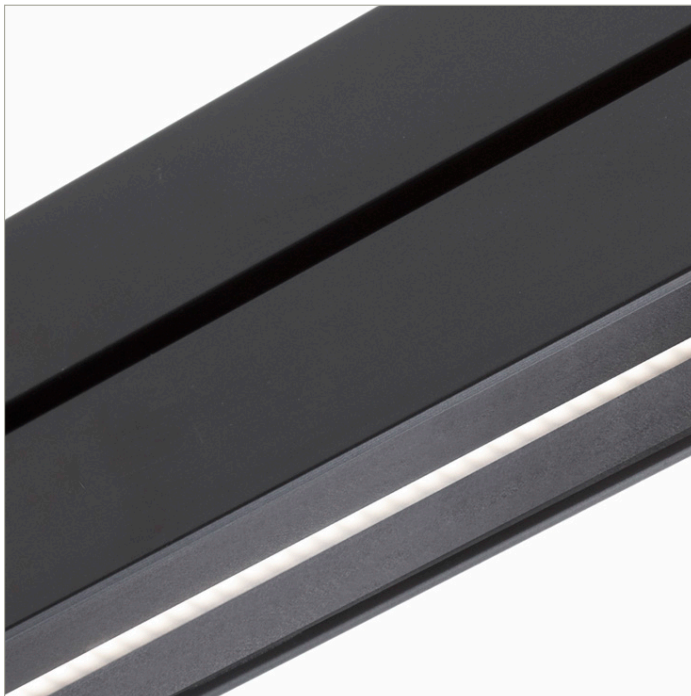

IES Report




DoubleBox™ | 107 | Wide Batwing, up | 40° Symmetric, down | 80 CRI | SO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-35-G1S1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	82	84	86	86
Total Lumens, 4' rail length (1219mm)	3888	4011	4092	4092
Lumens per foot (305mm)	972	1003	1023	1023
Lumens per foot UP (305mm)	743	766	782	782
Lumens per foot DOWN (305mm)	229	237	241	241
Input Power (W), 4' rail length (1219mm)	47.8	47.8	47.8	47.8
Watts per foot (305mm)	12.0	12.0	12.0	12.0
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

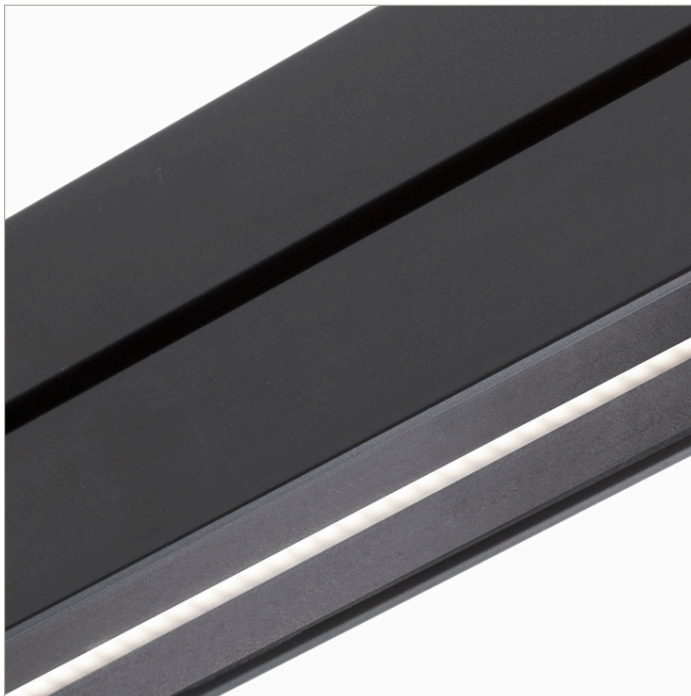

IES Report




DoubleBox™ | 107 | Wide Batwing, up | 40° Symmetric, down | 80 CRI | HO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-35-G1S1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	76	78	80	80
Total Lumens, 4' rail length (1219mm)	7387	7620	7776	7776
Lumens per foot (305mm)	1847	1905	1944	1944
Lumens per foot UP (305mm)	1411	1456	1485	1485
Lumens per foot DOWN (305mm)	436	450	459	459
Input Power (W), 4' rail length (1219mm)	98.1	98.1	98.1	98.1
Watts per foot (305mm)	24.6	24.6	24.6	24.6
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

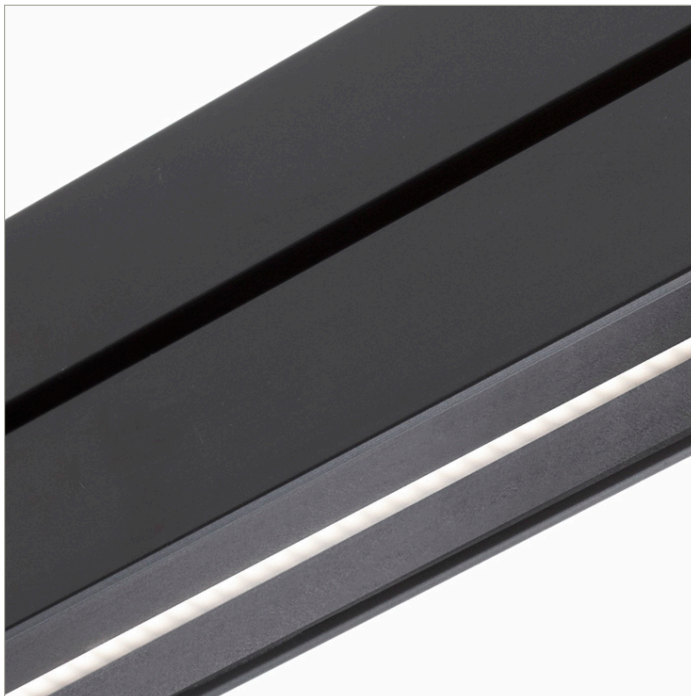

IES Report




DoubleBox™ | 107 | Wide Batwing, up | 40° Symmetric, down | 90 CRI | LO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-359-G1S1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	61	63	64	65
Total Lumens, 4' rail length (1219mm)	1676	1729	1764	1782
Lumens per foot (305mm)	419	432	441	445
Lumens per foot UP (305mm)	320	330	337	340
Lumens per foot DOWN (305mm)	99	102	104	105
Input Power (W), 4' rail length (1219mm)	27.6	27.6	27.6	27.6
Watts per foot (305mm)	6.9	6.9	6.9	6.9
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

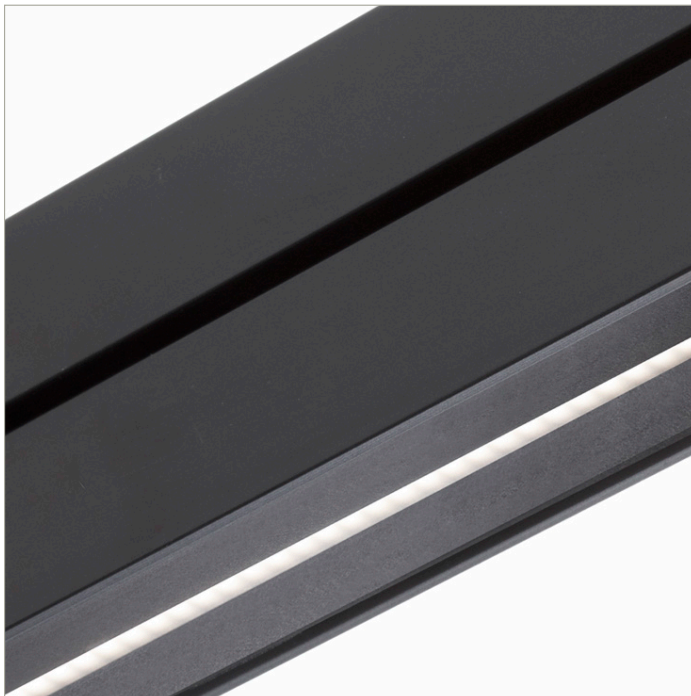

IES Report




DoubleBox™ | 107 | Wide Batwing, up | 40° Symmetric, down | 90 CRI | SO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-359-G1S1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	71	73	74	75
Total Lumens, 4' rail length (1219mm)	3352	3457	3528	3563
Lumens per foot (305mm)	838	864	882	891
Lumens per foot UP (305mm)	640	660	674	681
Lumens per foot DOWN (305mm)	198	204	208	210
Input Power (W), 4' rail length (1219mm)	47.8	47.8	47.8	47.8
Watts per foot (305mm)	12.0	12.0	12.0	12.0
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

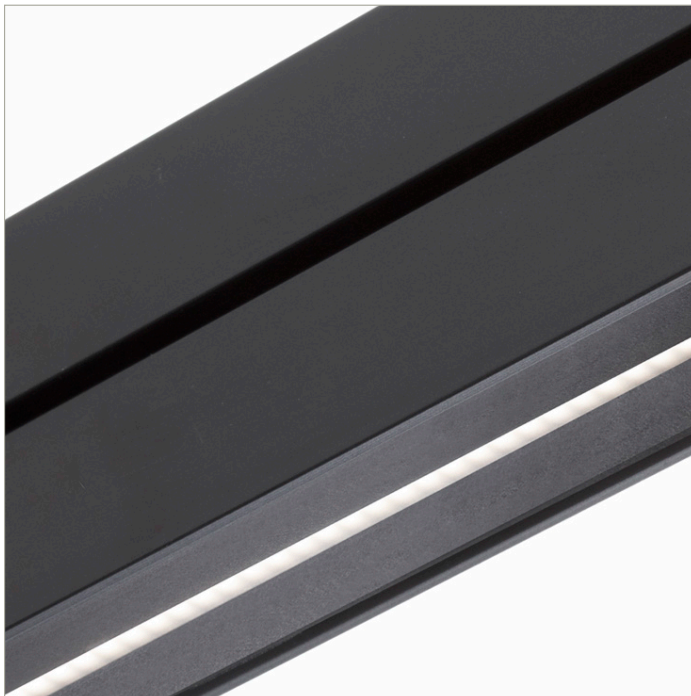

IES Report

DoubleBox™ | 107 | Wide Batwing, up | 40° Symmetric, down | 90 CRI | HO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-359-G1S1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	65	67	69	70
Total Lumens, 4' rail length (1219mm)	6368	6569	6703	6770
Lumens per foot (305mm)	1592	1642	1676	1693
Lumens per foot UP (305mm)	1216	1255	1281	1293
Lumens per foot DOWN (305mm)	376	388	395	399
Input Power (W), 4' rail length (1219mm)	98.1	98.1	98.1	98.1
Watts per foot (305mm)	24.6	24.6	24.6	24.6
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).