

IES Report




DoubleBox™ | 107 | Wide Batwing, up | 85° Asymmetric, down | 80 CRI | LO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-35-G1A1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	86	89	90	90
Total Lumens, 4' rail length (1219mm)	2356	2430	2480	2480
Lumens per foot (305mm)	589	607	620	620
Lumens per foot UP (305mm)	371	383	391	391
Lumens per foot DOWN (305mm)	218	224	229	229
Input Power (W), 4' rail length (1219mm)	27.6	27.6	27.6	27.6
Watts per foot (305mm)	6.9	6.9	6.9	6.9
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

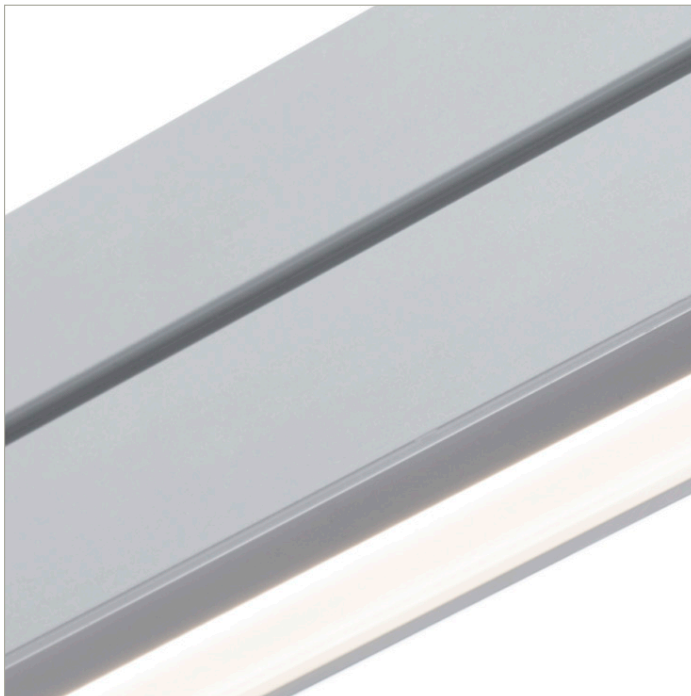

IES Report




DoubleBox™ | 107 | Wide Batwing, up | 85° Asymmetric, down | 80 CRI | SO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-35-G1A1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	99	102	104	104
Total Lumens, 4' rail length (1219mm)	4711	4860	4959	4959
Lumens per foot (305mm)	1178	1215	1240	1240
Lumens per foot UP (305mm)	743	766	782	782
Lumens per foot DOWN (305mm)	435	449	458	458
Input Power (W), 4' rail length (1219mm)	47.8	47.8	47.8	47.8
Watts per foot (305mm)	12.0	12.0	12.0	12.0
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

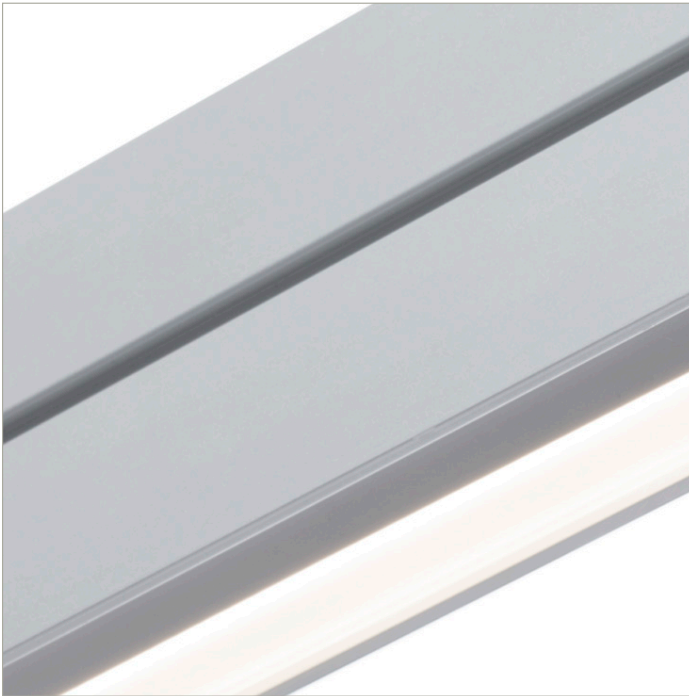

IES Report




DoubleBox™ | 107 | Wide Batwing, up | 85° Asymmetric, down | 80 CRI | HO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-35-G1A1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	92	95	97	97
Total Lumens, 4' rail length (1219mm)	8951	9234	9422	9422
Lumens per foot (305mm)	2238	2308	2356	2356
Lumens per foot UP (305mm)	1411	1456	1485	1485
Lumens per foot DOWN (305mm)	827	853	870	870
Input Power (W), 4' rail length (1219mm)	98.1	98.1	98.1	98.1
Watts per foot (305mm)	24.6	24.6	24.6	24.6
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

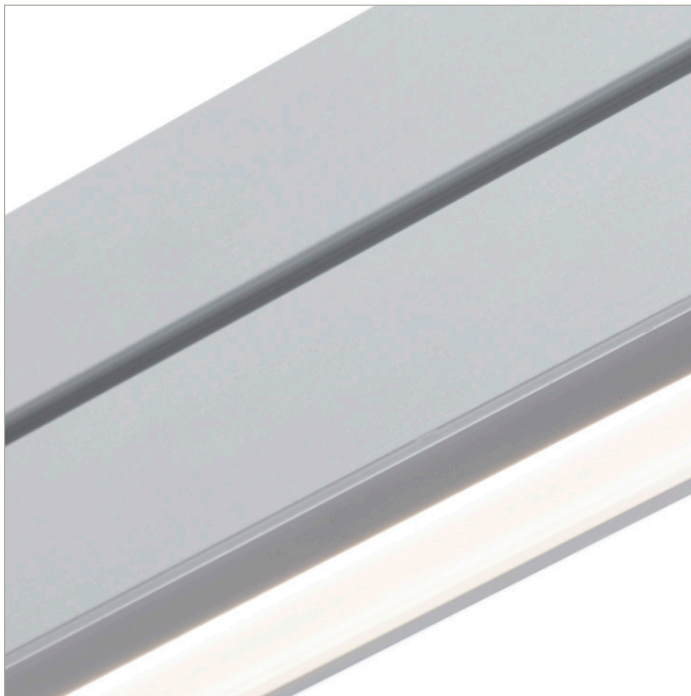

IES Report




DoubleBox™ | 107 | Wide Batwing, up | 85° Asymmetric, down | 90 CRI | LO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-359-G1A1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	74	76	78	79
Total Lumens, 4' rail length (1219mm)	2031	2095	2138	2159
Lumens per foot (305mm)	508	524	534	540
Lumens per foot UP (305mm)	320	330	337	340
Lumens per foot DOWN (305mm)	188	194	197	199
Input Power (W), 4' rail length (1219mm)	27.6	27.6	27.6	27.6
Watts per foot (305mm)	6.9	6.9	6.9	6.9
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

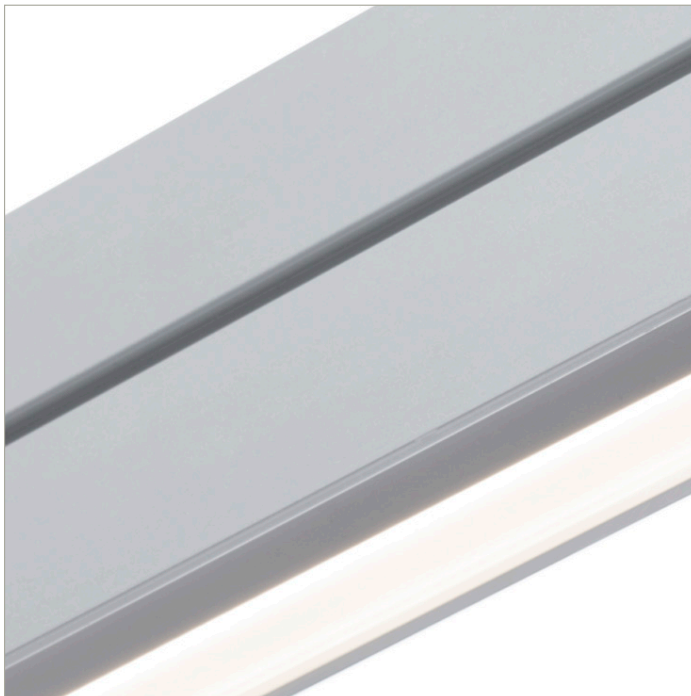

IES Report




DoubleBox™ | 107 | Wide Batwing, up | 85° Asymmetric, down | 90 CRI | SO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-359-G1A1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	85	88	90	91
Total Lumens, 4' rail length (1219mm)	4061	4190	4275	4318
Lumens per foot (305mm)	1015	1047	1069	1079
Lumens per foot UP (305mm)	640	660	674	681
Lumens per foot DOWN (305mm)	375	387	395	399
Input Power (W), 4' rail length (1219mm)	47.8	47.8	47.8	47.8
Watts per foot (305mm)	12.0	12.0	12.0	12.0
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

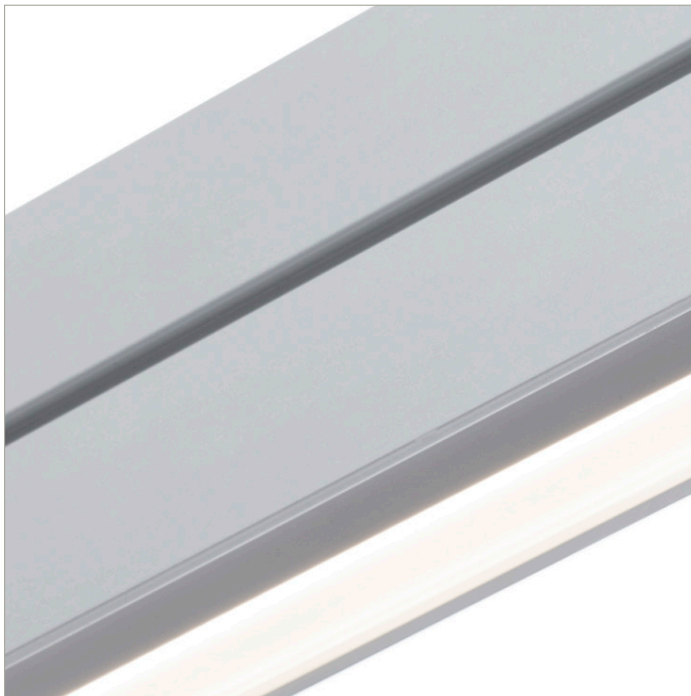

IES Report

DoubleBox™ | 107 | Wide Batwing, up | 85° Asymmetric, down | 90 CRI | HO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-359-G1A1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	79	82	83	84
Total Lumens, 4' rail length (1219mm)	7716	7960	8123	8204
Lumens per foot (305mm)	1929	1990	2031	2051
Lumens per foot UP (305mm)	1216	1255	1281	1293
Lumens per foot DOWN (305mm)	713	735	750	758
Input Power (W), 4' rail length (1219mm)	98.1	98.1	98.1	98.1
Watts per foot (305mm)	24.6	24.6	24.6	24.6
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).