

IES Report




WingRail® | 107 | Black Baffle with EdgeSoft™ | 80 CRI | LO

107-WG-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-35-BB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	57	59	60	60
Total Lumens, 4' rail length (1219mm)	787	812	828	828
Lumens per foot (305mm)	197	203	207	207
Input Power (W), 4' rail length (1219mm)	13.8	13.8	13.8	13.8
Watts per foot (305mm)	3.5	3.5	3.5	3.5
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

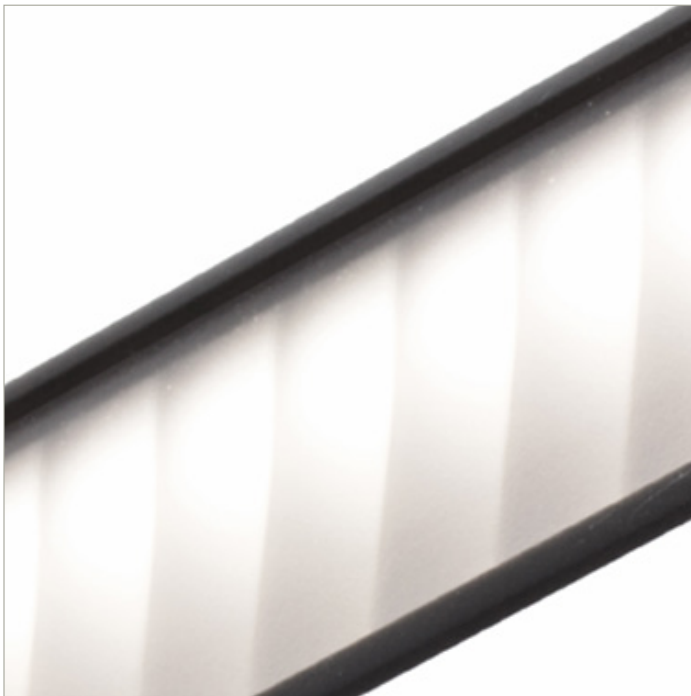

IES Report




WingRail® | 107 | Black Baffle with EdgeSoft™ | 80 CRI | SO

107-WG-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-35-BB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	66	68	69	69
Total Lumens, 4' rail length (1219mm)	1574	1623	1657	1657
Lumens per foot (305mm)	393	406	414	414
Input Power (W), 4' rail length (1219mm)	24.1	24.1	24.1	24.1
Watts per foot (305mm)	6.1	6.1	6.1	6.1
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

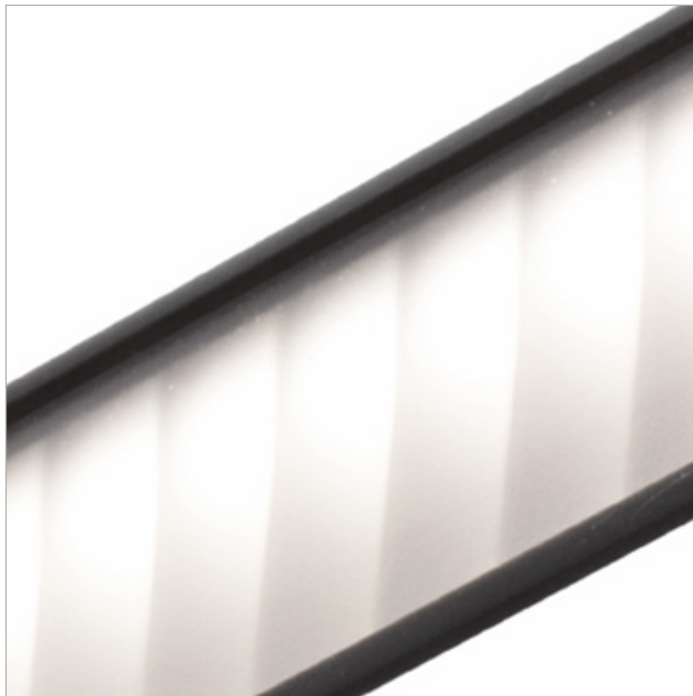

IES Report




WingRail® | 107 | Black Baffle with EdgeSoft™ | 80 CRI | HO

107-WG-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-35-BB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	61	63	65	65
Total Lumens, 4' rail length (1219mm)	2990	3085	3148	3148
Lumens per foot (305mm)	748	771	787	787
Input Power (W), 4' rail length (1219mm)	49.1	49.1	49.1	49.1
Watts per foot (305mm)	12.3	12.3	12.3	12.3
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

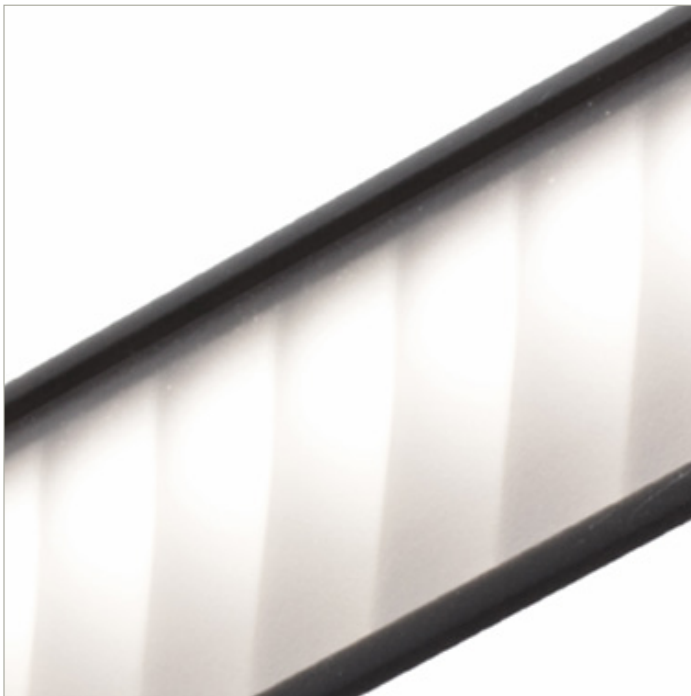

IES Report




WingRail® | 107 | Black Baffle with EdgeSoft™ | 90 CRI | LO

107-WG-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-359-BB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	50	51	52	53
Total Lumens, 4' rail length (1219mm)	678	700	714	721
Lumens per foot (305mm)	170	175	179	180
Input Power (W), 4' rail length (1219mm)	13.8	13.8	13.8	13.8
Watts per foot (305mm)	3.5	3.5	3.5	3.5
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

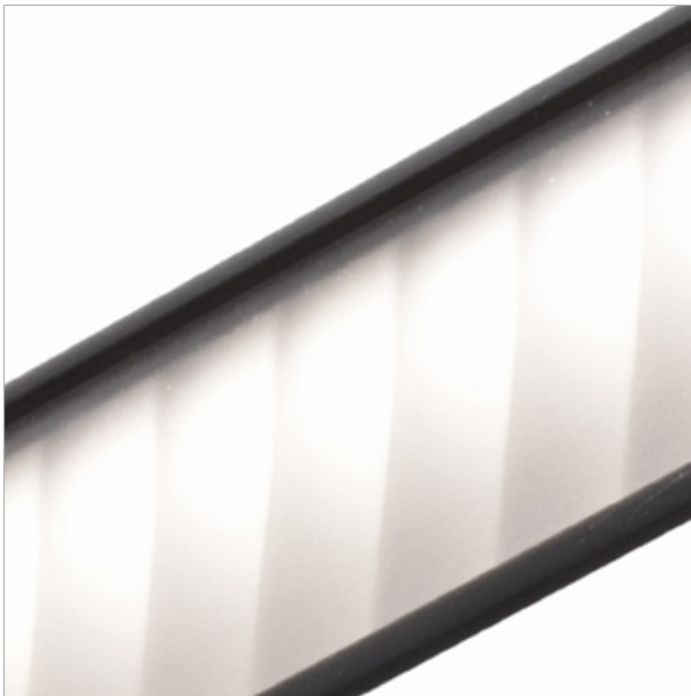

IES Report




WingRail® | 107 | Black Baffle with EdgeSoft™ | 90 CRI | SO

107-WG-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-359-BB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	57	59	60	61
Total Lumens, 4' rail length (1219mm)	1357	1400	1428	1442
Lumens per foot (305mm)	339	350	357	361
Input Power (W), 4' rail length (1219mm)	24.0	24.0	24.0	24.0
Watts per foot (305mm)	6.0	6.0	6.0	6.0
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

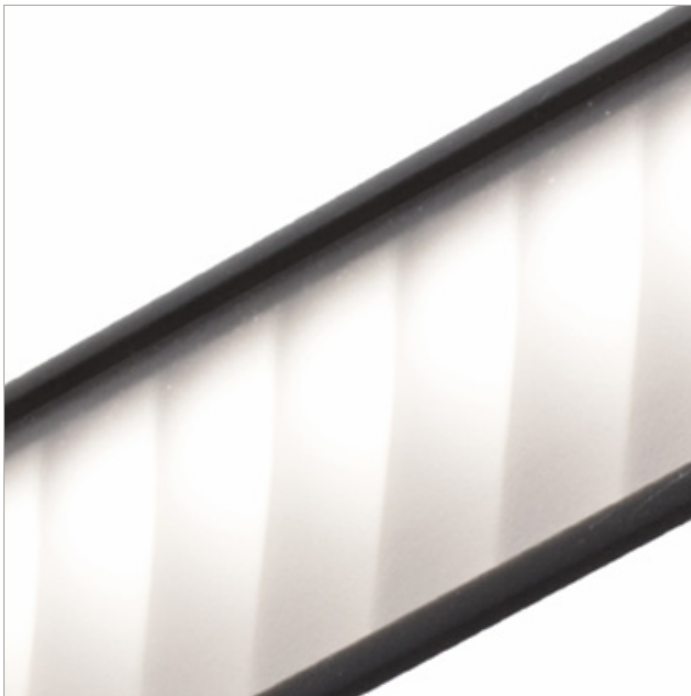

IES Report

WingRail® | 107 | Black Baffle with EdgeSoft™ | 90 CRI | HO

107-WG-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-359-BB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	53	55	56	56
Total Lumens, 4' rail length (1219mm)	2578	2659	2713	2741
Lumens per foot (305mm)	644	665	678	685
Input Power (W), 4' rail length (1219mm)	49.1	49.1	49.1	49.1
Watts per foot (305mm)	12.3	12.3	12.3	12.3
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).