

## IES Report

# BoxRail® | 107 | 60° Symmetric | 80 CRI | HO

107-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-35-S2-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	66	69	70	70
Total Lumens, 4' rail length (1219mm)	3235	3337	3405	3405
Lumens per foot (305mm)	809	834	851	851
Input Power (W), 4' rail length (1219mm)	49.1	49.1	49.1	49.1
Watts per foot (305mm)	12.3	12.3	12.3	12.3
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



## IES INDOOR REPORT

PHOTOMETRIC FILENAME : VODE\_107\_BX\_HO\_35\_S2.IES

### DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] L121911510 (SOURCE REPORT FOR REFERENCE)

[TESTLAB] REPORT BASED ON DATA FROM NVLAP ACCREDITED LAB

[ISSUE DATE] 12/23/2019

[MANUFAC] Vode Lighting

[LUMCAT] 107-BX-48-Z-HO-35-S2-AL

[LUMINAIRE] BoxRail LED, 48", 3500K, 80 CRI, zipper board, 60° white symmetric lens,

[MORE] high output, clear anodized finish

[TEST PROCEDURE] IESNA:LM-79-08

### CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	3398
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	69
Total Luminaire Watts	49.06
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.84
Spacing Criterion (90-270)	1.12
Spacing Criterion (Diagonal)	0.96
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.02 ft
Luminous Width (90-270)	3.84 ft
Luminous Height	0.00 ft

### LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	70140	109784	201707
55	49948	73579	145547
65	41548	55397	104235
75	36897	44038	74984
85	0	21207	45949

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_107\_BX\_HO\_35\_S2.IES**

**CANDELA TABULATION**

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
<b>0</b>	2472.8	2472.8	2472.8	2472.8	2472.8	2472.8	2472.8	2472.8	2472.8	2472.8
<b>5</b>	2431.0	2428.8	2428.8	2428.8	2428.8	2428.8	2426.6	2435.4	2442.0	2446.4
<b>10</b>	2305.6	2294.6	2296.8	2296.8	2299.0	2299.0	2303.4	2323.2	2340.8	2354.0
<b>15</b>	2072.4	2050.4	2054.8	2061.4	2070.2	2074.6	2090.0	2129.6	2167.0	2193.4
<b>20</b>	1738.0	1709.4	1720.4	1731.4	1742.4	1755.6	1782.0	1839.2	1903.0	1960.2
<b>25</b>	1355.2	1320.0	1335.4	1350.8	1372.8	1394.8	1436.6	1509.2	1592.8	1661.0
<b>30</b>	992.2	961.4	976.8	994.4	1023.0	1047.2	1086.8	1163.8	1256.2	1335.4
<b>35</b>	699.6	675.4	688.6	706.2	721.6	745.8	785.4	855.8	941.6	1027.4
<b>40</b>	492.8	477.4	486.2	499.4	519.2	536.8	565.4	618.2	688.6	759.0
<b>45</b>	354.2	343.2	352.0	360.8	371.8	385.0	407.0	448.8	499.4	554.4
<b>50</b>	264.0	257.4	261.8	268.4	277.2	286.0	301.4	327.8	365.2	404.8
<b>55</b>	204.6	200.2	202.4	206.8	213.4	217.8	228.8	248.6	270.6	301.4
<b>60</b>	160.6	158.4	160.6	162.8	167.2	171.6	178.2	189.2	204.6	224.4
<b>65</b>	125.4	123.2	125.4	127.6	129.8	132.0	136.4	143.0	154.0	167.2
<b>70</b>	94.6	94.6	94.6	96.8	96.8	99.0	101.2	107.8	112.2	121.0
<b>75</b>	68.2	66.0	68.2	68.2	68.2	70.4	70.4	72.6	77.0	81.4
<b>80</b>	41.8	41.8	41.8	41.8	41.8	41.8	41.8	44.0	46.2	48.4
<b>85</b>	0.0	0.0	0.0	2.2	2.2	2.2	4.4	4.4	8.8	13.2
<b>90</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**Vert. Angles**      **Horizontal Angles**

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>
<b>0</b>	2472.8	2472.8	2472.8	2472.8	2472.8	2472.8	2472.8	2472.8	2472.8
<b>5</b>	2450.8	2453.0	2455.2	2457.4	2459.6	2459.6	2461.8	2461.8	2461.8
<b>10</b>	2365.0	2376.0	2387.0	2395.8	2402.4	2406.8	2411.2	2413.4	2413.4
<b>15</b>	2217.6	2241.8	2268.2	2288.0	2303.4	2314.4	2321.0	2327.6	2327.6
<b>20</b>	2008.6	2052.6	2094.4	2129.6	2153.8	2173.6	2186.8	2195.6	2197.8
<b>25</b>	1729.2	1801.8	1863.4	1914.0	1955.8	1986.6	2006.4	2019.6	2024.0
<b>30</b>	1423.4	1507.0	1590.6	1658.8	1716.0	1755.6	1782.0	1799.6	1804.0
<b>35</b>	1117.6	1214.4	1300.2	1381.6	1445.4	1493.8	1526.8	1544.4	1551.0
<b>40</b>	840.4	928.4	1016.4	1100.0	1168.2	1218.8	1254.0	1273.8	1280.4
<b>45</b>	620.4	690.8	770.0	844.8	906.4	957.0	992.2	1012.0	1018.6
<b>50</b>	453.2	508.2	572.0	631.4	684.2	728.2	761.2	778.8	785.4
<b>55</b>	334.4	374.0	418.0	464.2	508.2	545.6	572.0	587.4	596.2
<b>60</b>	248.6	275.0	308.0	341.0	371.8	398.2	420.2	433.4	437.8
<b>65</b>	182.6	200.2	222.2	244.2	266.2	286.0	301.4	312.4	314.6
<b>70</b>	129.8	140.8	156.2	169.4	184.8	198.0	209.0	215.6	217.8
<b>75</b>	85.8	92.4	101.2	110.0	118.8	125.4	132.0	136.4	138.6
<b>80</b>	50.6	52.8	57.2	61.6	66.0	68.2	72.6	74.8	74.8
<b>85</b>	17.6	19.8	22.0	24.2	24.2	26.4	26.4	28.6	28.6
<b>90</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_107\_BX\_HO\_35\_S2.IES**

**ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	840.59	N.A.	24.70
0-30	1602.18	N.A.	47.20
0-40	2276.68	N.A.	67.00
0-60	3083.24	N.A.	90.70
0-80	3376.24	N.A.	99.40
0-90	3397.9	N.A.	100.00
10-90	3167.56	N.A.	93.20
20-40	1436.08	N.A.	42.30
20-50	1923.9	N.A.	56.60
40-70	1000.93	N.A.	29.50
60-80	293.00	N.A.	8.60
70-80	98.64	N.A.	2.90
80-90	21.66	N.A.	0.60
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	3397.9	N.A.	100.00

Total Luminaire Efficiency = N.A. %

**ZONAL LUMEN SUMMARY**

Zone	Lumens
0-10	230.35
10-20	610.25
20-30	761.59
30-40	674.50
40-50	487.82
50-60	318.74
60-70	194.37
70-80	98.64
80-90	21.66
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_107\_BX\_HO\_35\_S2.IES**

**COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD**

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	108	104	101	109	105	102	100	101	99	97	97	95	94	94	92	91	89
2	104	97	92	87	101	95	90	86	92	88	84	89	85	82	86	83	81	79
3	96	88	81	76	94	86	80	75	84	78	74	81	77	73	79	75	72	70
4	90	80	73	67	88	79	72	67	76	71	66	74	69	65	72	68	64	63
5	84	73	66	60	82	72	65	60	70	64	59	68	63	59	67	62	58	56
6	79	67	60	54	77	67	59	54	65	59	54	63	58	53	62	57	53	51
7	74	62	55	50	72	62	54	49	60	54	49	59	53	49	58	52	49	47
8	69	58	50	45	68	57	50	45	56	50	45	55	49	45	54	49	45	43
9	65	54	47	42	64	53	46	42	52	46	42	51	46	41	50	45	41	40
10	62	50	43	39	61	50	43	39	49	43	39	48	42	38	47	42	38	37

POLAR GRAPH

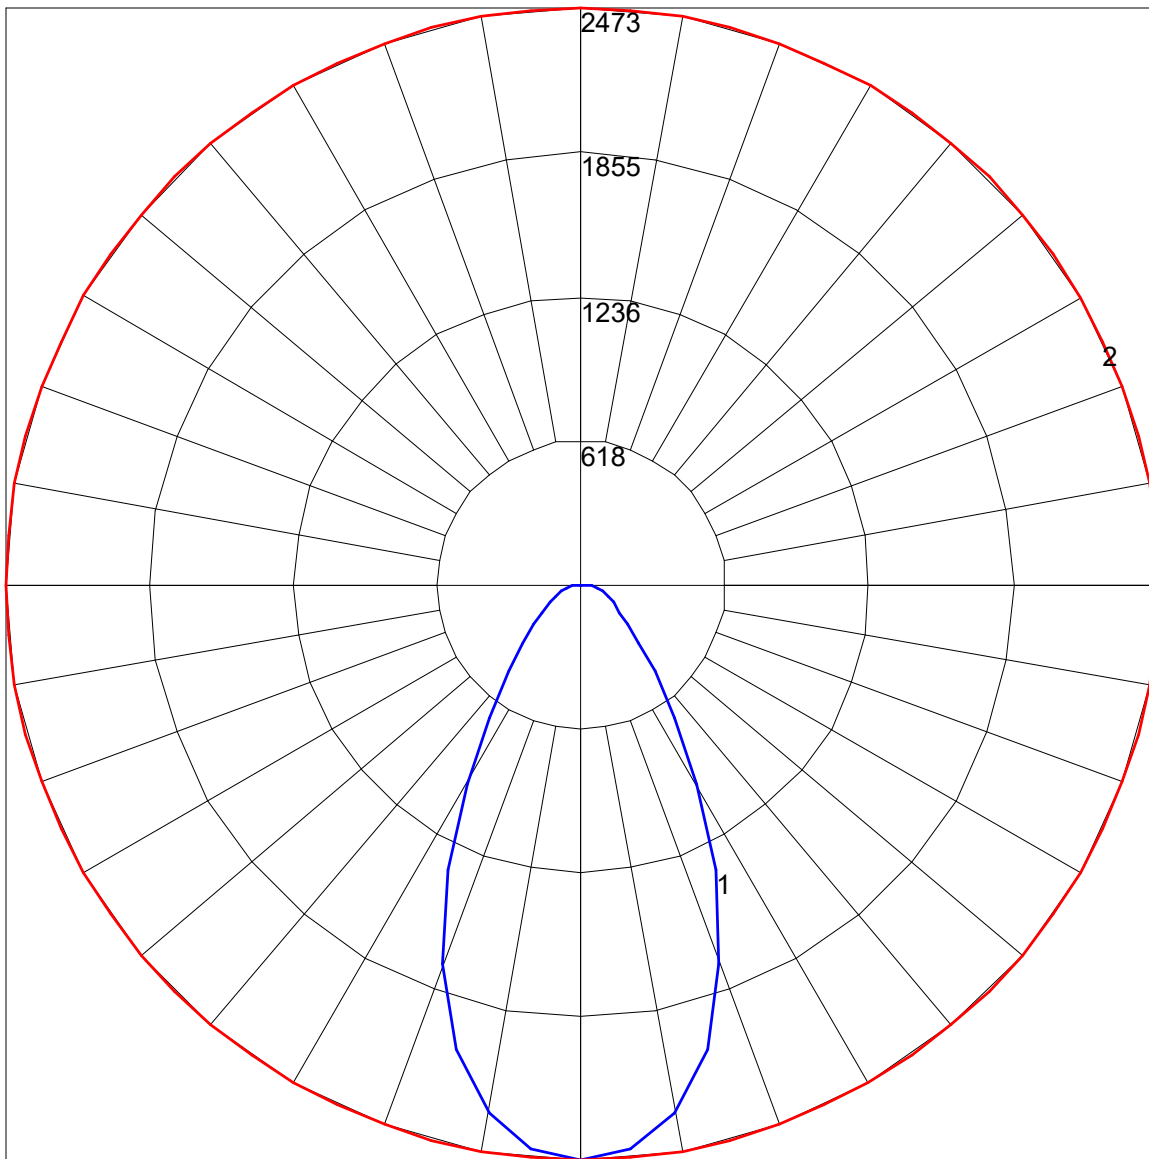

Maximum Candela = 2472.8 Located At Horizontal Angle = 0, Vertical Angle = 0  
# 1 - Vertical Plane Through Horizontal Angles (0 - 180)  
# 2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)