

## IES Report

# ZipTwo® | 707 | Micro 3508, 60° Symmetric | 90 CRI | LO

707-Z2-4-48-XX-XX-X-0-Z-LO-359-S2-X-BL-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	46	48	49	49
Total Lumens, 4' rail length (1219mm)	683	704	719	726
Lumens per foot (305mm)	171	176	180	181
Input Power (W), 4' rail length (1219mm)	14.9	14.9	14.9	14.9
Watts per foot (305mm)	3.8	3.8	3.8	3.8
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



## IES INDOOR REPORT

PHOTOMETRIC FILENAME : VODE\_707\_Z2\_LO\_359\_S2\_BL.IES

### DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] L121911528 (SOURCE REPORT FOR REFERENCE)

[TESTLAB] REPORT BASED ON DATA FROM NVLAP ACCREDITED LAB

[ISSUE DATE] 12/23/2019

[MANUFAC] Vode Lighting

[LUMCAT] 707-Z2-48-Z-LO-359-S2-BL

[LUMINAIRE] ZipTwo LED, 48", 3500K, 90 CRI, zipper board, micro 3508, 60° symmetric black lens,

[MORE] low output, black anodized finish

[TEST PROCEDURE] IESNA:LM-79-08

### CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	719
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	48
Total Luminaire Watts	14.89
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.84
Spacing Criterion (90-270)	1.08
Spacing Criterion (Diagonal)	0.96
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.02 ft
Luminous Width (90-270)	3.98 ft
Luminous Height	0.00 ft

### LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	13374	22879	34390
55	6242	11306	17783
65	3516	6074	9430
75	2088	3654	5742
85	1550	2325	3100

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_707\_Z2\_LO\_359\_S2\_BL.IES**

**CANDELA TABULATION**

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
<b>0.0</b>	595.0	595.0	595.0	595.0	595.0	595.0	595.0	595.0	595.0	595.0
<b>1.0</b>	595.5	595.0	595.0	595.5	595.0	595.0	595.0	595.0	595.5	595.5
<b>3.0</b>	592.5	592.5	592.5	592.5	593.0	593.0	593.0	593.0	593.5	593.5
<b>5.0</b>	586.5	586.5	586.5	586.5	587.0	587.5	588.0	588.0	588.5	589.0
<b>7.0</b>	576.0	576.0	576.5	577.0	577.5	578.5	579.0	580.0	581.5	582.5
<b>9.0</b>	562.5	562.0	563.0	563.5	565.0	566.0	567.5	569.0	571.5	573.0
<b>11.0</b>	544.0	544.0	545.0	546.0	547.5	550.0	552.5	555.0	557.5	560.5
<b>13.0</b>	522.0	522.5	523.5	525.0	527.5	530.5	534.0	538.0	542.0	545.5
<b>15.0</b>	496.5	497.0	499.0	501.0	504.5	508.0	512.5	517.5	523.0	528.0
<b>17.0</b>	468.0	469.0	470.5	473.5	477.5	482.5	488.0	494.5	501.5	508.0
<b>19.5</b>	428.5	429.0	431.5	435.0	440.5	447.0	454.0	462.0	470.5	479.0
<b>22.5</b>	376.5	377.5	380.5	385.0	391.5	399.0	408.5	418.5	429.0	440.0
<b>25.5</b>	322.0	323.0	326.5	331.5	339.0	348.0	358.5	370.0	383.0	396.0
<b>29.0</b>	260.0	261.0	265.0	270.5	278.5	288.5	299.5	312.5	326.5	341.0
<b>33.0</b>	195.5	196.5	200.0	205.5	213.0	223.0	234.5	248.0	262.5	277.5
<b>37.5</b>	135.0	136.0	139.0	143.5	150.5	159.0	169.5	181.5	195.0	209.5
<b>42.5</b>	86.0	86.5	89.0	92.5	97.5	104.5	112.5	122.0	132.5	144.0
<b>47.5</b>	54.0	54.5	56.0	58.5	62.0	66.5	72.5	79.5	87.0	95.5
<b>55.0</b>	26.5	27.0	27.5	29.0	31.0	33.0	36.0	40.0	44.0	48.0
<b>65.0</b>	11.0	11.0	11.0	11.5	12.5	13.5	14.5	16.0	17.5	19.0
<b>75.0</b>	4.0	4.0	4.5	4.5	5.0	5.0	5.5	6.0	6.5	7.0
<b>85.0</b>	1.0	1.0	1.0	1.0	1.0	1.5	1.5	1.5	1.5	1.5
<b>90.0</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**Vert. Angles**      **Horizontal Angles**

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>
<b>0.0</b>	595.0	595.0	595.0	595.0	595.0	595.0	595.0	595.0	595.0
<b>1.0</b>	595.0	595.0	595.5	595.5	595.5	595.5	595.5	595.5	595.0
<b>3.0</b>	593.5	594.0	594.0	594.0	594.0	594.0	594.0	594.5	594.5
<b>5.0</b>	589.5	590.0	591.0	591.0	591.5	591.5	592.0	592.0	592.0
<b>7.0</b>	583.5	584.5	585.5	586.5	587.0	588.0	588.5	588.5	588.5
<b>9.0</b>	575.0	577.0	578.0	580.0	581.0	582.0	583.0	583.0	583.0
<b>11.0</b>	563.5	566.0	568.5	571.0	573.0	574.5	575.5	576.0	576.0
<b>13.0</b>	549.5	553.5	557.0	560.0	563.0	565.0	566.5	567.5	568.0
<b>15.0</b>	533.5	538.5	543.0	547.5	551.0	554.0	556.0	557.5	558.0
<b>17.0</b>	514.5	521.0	527.0	532.5	537.0	540.5	543.5	545.0	545.0
<b>19.5</b>	488.0	496.5	504.0	510.5	516.5	521.0	524.5	526.0	527.0
<b>22.5</b>	451.5	461.5	471.0	479.0	486.0	492.5	496.5	499.0	500.0
<b>25.5</b>	409.0	421.0	432.5	443.0	451.5	458.0	463.0	466.0	467.0
<b>29.0</b>	356.0	370.0	383.0	395.0	405.0	412.5	418.5	421.5	422.5
<b>33.0</b>	293.0	308.0	322.5	335.0	345.5	353.5	359.0	363.0	364.0
<b>37.5</b>	224.0	238.5	252.0	264.0	274.5	282.0	287.5	291.0	292.0
<b>42.5</b>	157.0	168.5	180.0	190.0	198.5	205.0	209.5	212.5	213.5
<b>47.5</b>	104.5	113.0	121.5	128.5	135.0	140.0	143.5	145.5	146.5
<b>55.0</b>	53.0	57.5	61.5	65.5	69.0	72.0	74.0	75.0	75.5
<b>65.0</b>	20.5	22.5	24.0	25.5	27.0	28.0	29.0	29.5	29.5
<b>75.0</b>	7.5	8.0	8.5	9.5	10.0	10.5	10.5	11.0	11.0
<b>85.0</b>	1.5	1.5	2.0	2.0	2.0	2.0	2.0	2.0	2.0
<b>90.0</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_707\_Z2\_LO\_359\_S2\_BL.IES**

**ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	194.08	N.A.	27.00
0-30	368.71	N.A.	51.30
0-40	508.60	N.A.	70.80
0-60	666.71	N.A.	92.80
0-80	713.39	N.A.	99.30
0-90	718.58	N.A.	100.00
10-90	673.35	N.A.	93.70
20-40	314.52	N.A.	43.80
20-50	425.31	N.A.	59.20
40-70	190.95	N.A.	26.60
60-80	46.68	N.A.	6.50
70-80	13.83	N.A.	1.90
80-90	5.19	N.A.	0.70
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	718.58	N.A.	100.00

Total Luminaire Efficiency = N.A. %

**ZONAL LUMEN SUMMARY**

Zone	Lumens
0-10	45.22
10-20	148.85
20-30	174.63
30-40	139.90
40-50	110.79
50-60	47.32
60-70	32.85
70-80	13.83
80-90	5.19
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_707\_Z2\_LO\_359\_S2\_BL.IES**

**COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD**

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	92	90
2	104	98	93	89	102	96	92	88	93	89	86	90	87	84	87	84	82	80
3	97	89	83	78	95	88	82	78	85	80	76	83	78	75	80	77	74	72
4	91	82	75	70	89	81	74	69	78	73	68	76	71	68	74	70	67	65
5	85	75	68	63	84	74	67	62	72	66	62	70	65	61	69	64	61	59
6	80	69	62	57	79	69	62	57	67	61	56	65	60	56	64	59	55	54
7	75	64	57	52	74	64	57	52	62	56	52	61	55	51	60	55	51	49
8	71	60	53	48	70	59	52	48	58	52	47	57	51	47	56	51	47	45
9	67	56	49	44	66	55	49	44	54	48	44	53	48	44	52	47	44	42
10	63	52	45	41	62	52	45	41	51	45	41	50	44	41	49	44	40	39

POLAR GRAPH

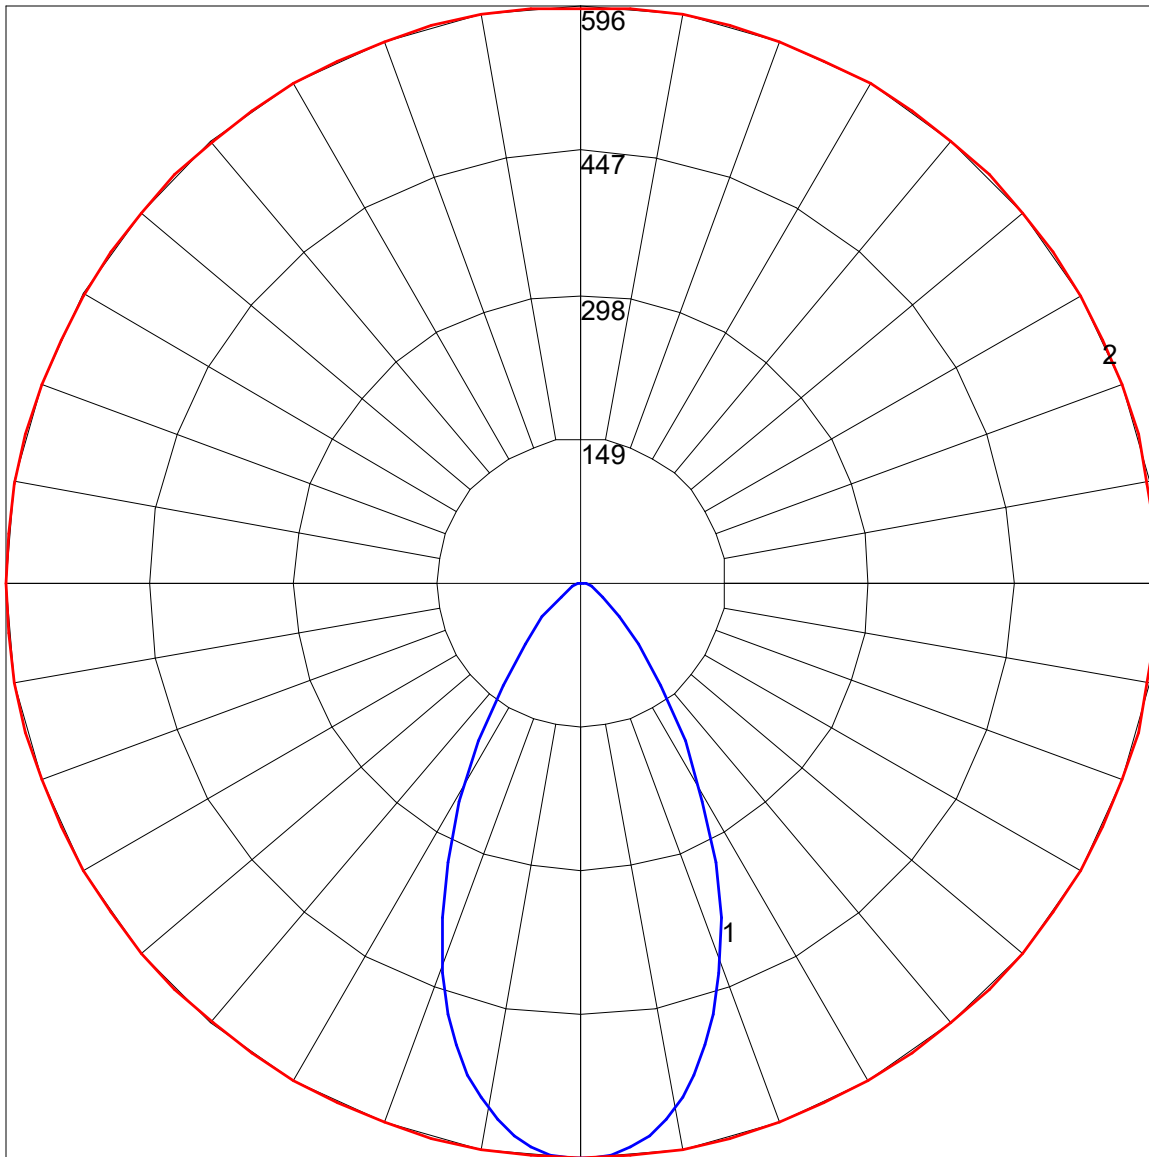

Maximum Candela = 595.5 Located At Horizontal Angle = 0, Vertical Angle = 1  
# 1 - Vertical Plane Through Horizontal Angles (0 - 180)  
# 2 - Horizontal Cone Through Vertical Angle (1) (Through Max. Cd.)