

## IES Report




# ZipTwo® | 707 | Square 3572, Diffuse | 80 CRI | LO

707-Z2-4-48-XX-XX-X-0-Z-LO-35-H6-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	132	136	138	138
Total Lumens, 4' rail length (1219mm)	1951	2013	2054	2054
Lumens per foot (305mm)	488	503	513	513
Input Power (W), 4' rail length (1219mm)	14.9	14.9	14.9	14.9
Watts per foot (305mm)	3.8	3.8	3.8	3.8
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

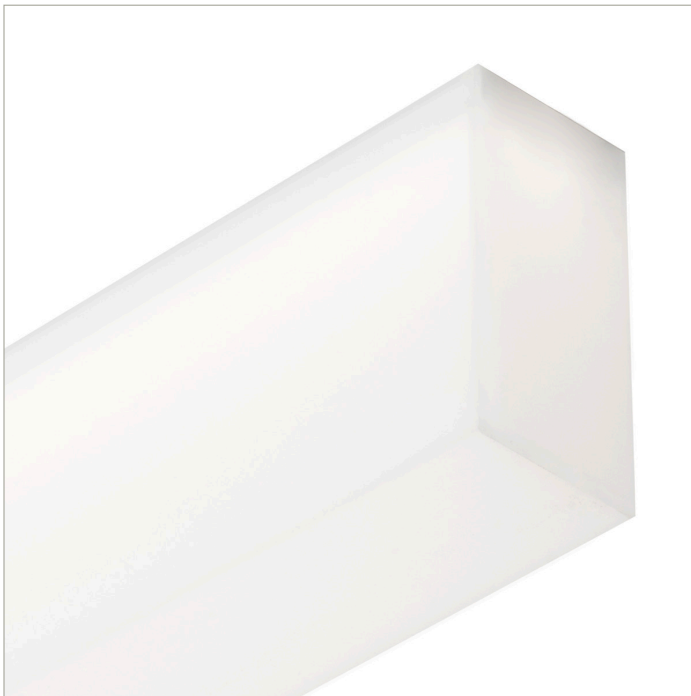

## IES Report




**ZipTwo® | 707 | Square 3572, Diffuse | 80 CRI | SO**

**707-Z2-4-48-XX-XX-X-0-Z-SO-35-H6-X-WH-0**

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	150	155	158	158
Total Lumens, 4' rail length (1219mm)	3903	4026	4108	4108
Lumens per foot (305mm)	976	1006	1027	1027
Input Power (W), 4' rail length (1219mm)	26.1	26.1	26.1	26.1
Watts per foot (305mm)	6.6	6.6	6.6	6.6
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

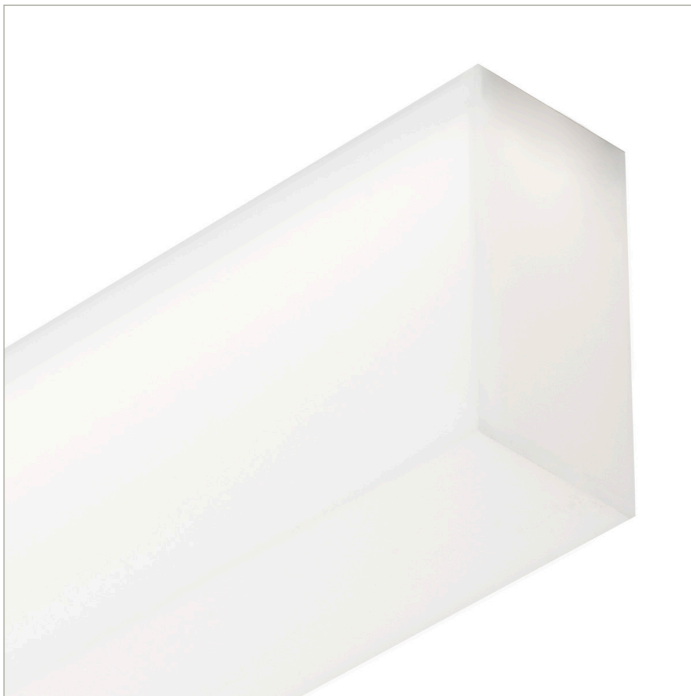

## IES Report




# ZipTwo® | 707 | Square 3572, Diffuse | 80 CRI | HO

707-Z2-4-48-XX-XX-X-0-Z-HO-35-H6-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	149	153	156	156
Total Lumens, 4' rail length (1219mm)	5854	6039	6162	6162
Lumens per foot (305mm)	1463	1510	1540	1540
Input Power (W), 4' rail length (1219mm)	39.6	39.6	39.6	39.6
Watts per foot (305mm)	9.9	9.9	9.9	9.9
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

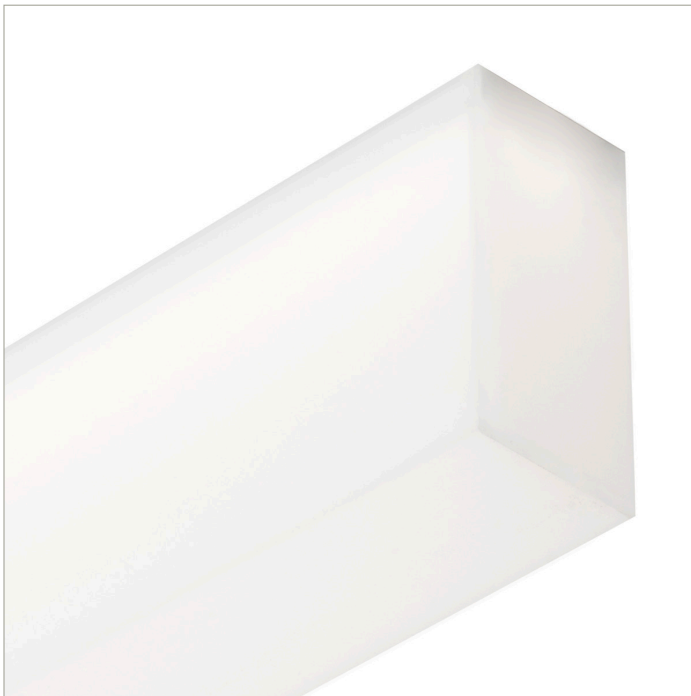

## IES Report




# ZipTwo® | 707 | Square 3572, Diffuse | 90 CRI | LO

707-Z2-4-48-XX-XX-X-0-Z-LO-359-H6-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	113	117	119	121
Total Lumens, 4' rail length (1219mm)	1682	1735	1771	1788
Lumens per foot (305mm)	421	434	443	447
Input Power (W), 4' rail length (1219mm)	14.9	14.9	14.9	14.9
Watts per foot (305mm)	3.8	3.8	3.8	3.8
CRI	95	95	95	95

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

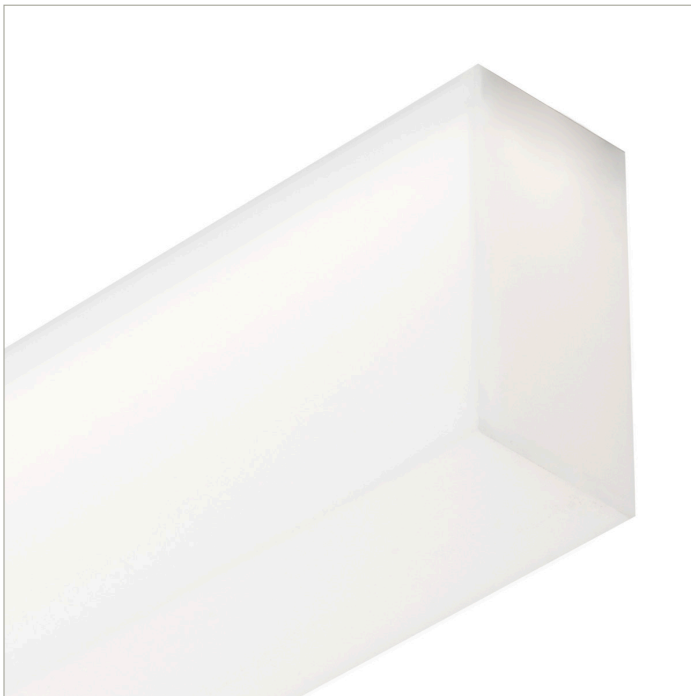

## IES Report




# ZipTwo® | 707 | Square 3572, Diffuse | 90 CRI | SO

707-Z2-4-48-XX-XX-X-0-Z-SO-359-H6-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	129	133	136	137
Total Lumens, 4' rail length (1219mm)	3364	3471	3541	3577
Lumens per foot (305mm)	841	868	885	894
Input Power (W), 4' rail length (1219mm)	26.2	26.2	26.2	26.2
Watts per foot (305mm)	6.6	6.6	6.6	6.6
CRI	95	95	95	95

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

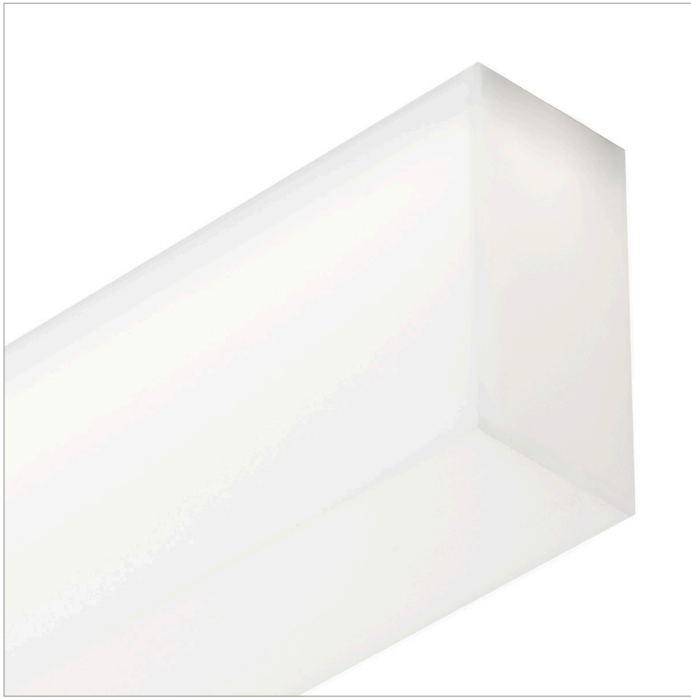

## IES Report

# ZipTwo® | 707 | Square 3572, Diffuse | 90 CRI | HO

707-Z2-4-48-XX-XX-X-0-Z-HO-359-H6-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	128	132	135	136
Total Lumens, 4' rail length (1219mm)	5046	5206	5312	5365
Lumens per foot (305mm)	1262	1301	1328	1341
Input Power (W), 4' rail length (1219mm)	39.6	39.6	39.6	39.6
Watts per foot (305mm)	9.9	9.9	9.9	9.9
CRI	95	95	95	95

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).