

## IES Report




# ZipTwo® | 707 | Square 3572, Side Diffuse | 80 CRI | LO

707-Z2-4-48-XX-XX-X-0-Z-LO-35-H9-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	122	126	128	128
Total Lumens, 4' rail length (1219mm)	1810	1867	1905	1905
Lumens per foot (305mm)	452	467	476	476
Input Power (W), 4' rail length (1219mm)	14.9	14.9	14.9	14.9
Watts per foot (305mm)	3.8	3.8	3.8	3.8
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

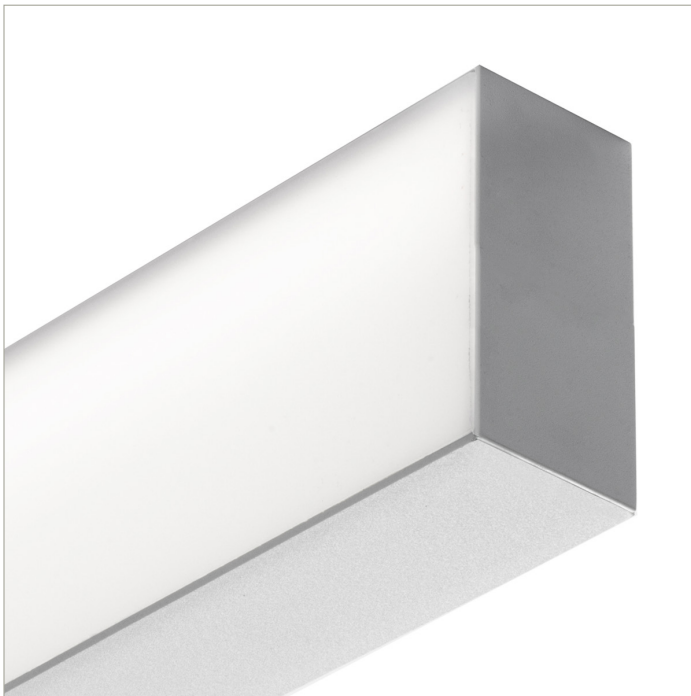

## IES Report




ZipTwo® | 707 | Square 3572, Side Diffuse | 80 CRI | SO

707-Z2-4-48-XX-XX-X-0-Z-SO-35-H9-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	139	143	146	146
Total Lumens, 4' rail length (1219mm)	3619	3734	3810	3810
Lumens per foot (305mm)	905	933	952	952
Input Power (W), 4' rail length (1219mm)	26.1	26.1	26.1	26.1
Watts per foot (305mm)	6.6	6.6	6.6	6.6
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

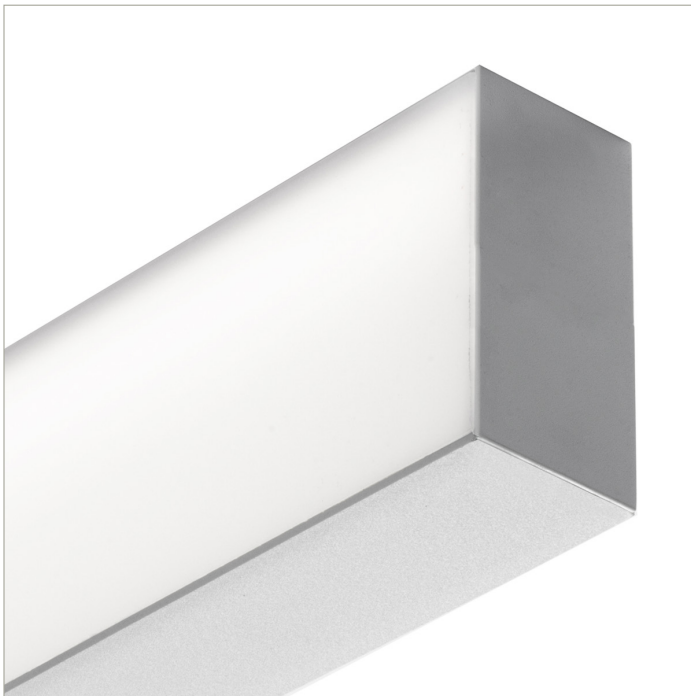

## IES Report




# ZipTwo® | 707 | Square 3572, Side Diffuse | 80 CRI | HO

707-Z2-4-48-XX-XX-X-0-Z-HO-35-H9-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	138	142	145	145
Total Lumens, 4' rail length (1219mm)	5429	5601	5715	5715
Lumens per foot (305mm)	1357	1400	1429	1429
Input Power (W), 4' rail length (1219mm)	39.6	39.6	39.6	39.6
Watts per foot (305mm)	9.9	9.9	9.9	9.9
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

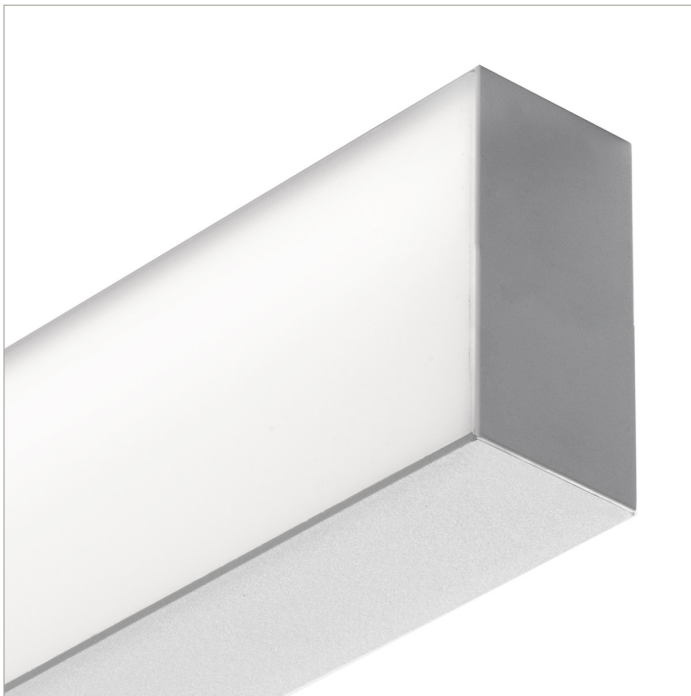

## IES Report




# ZipTwo® | 707 | Square 3572, Side Diffuse | 90 CRI | LO

707-Z2-4-48-XX-XX-X-0-Z-LO-359-H9-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	105	109	111	112
Total Lumens, 4' rail length (1219mm)	1560	1609	1642	1659
Lumens per foot (305mm)	390	402	411	415
Input Power (W), 4' rail length (1219mm)	14.9	14.9	14.9	14.9
Watts per foot (305mm)	3.8	3.8	3.8	3.8
CRI	95	95	95	95

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

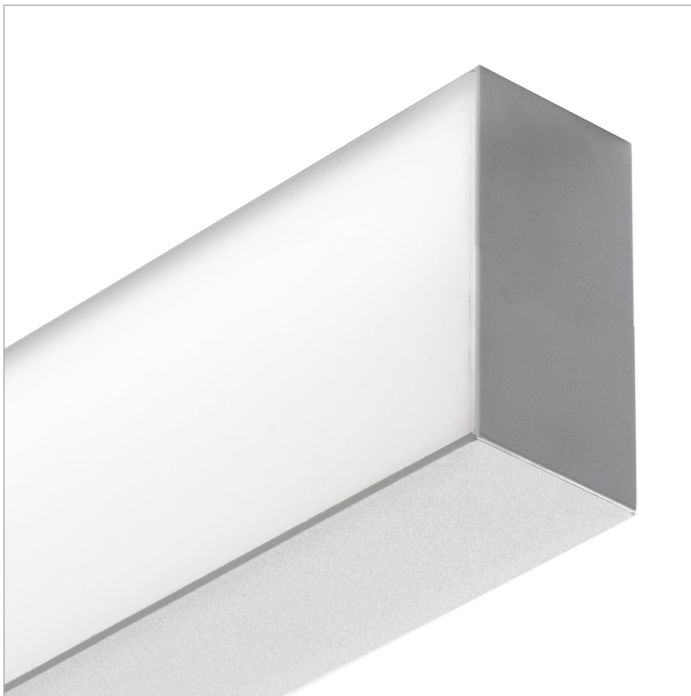

## IES Report




# ZipTwo® | 707 | Square 3572, Side Diffuse | 90 CRI | SO

707-Z2-4-48-XX-XX-X-0-Z-SO-359-H9-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	120	123	126	127
Total Lumens, 4' rail length (1219mm)	3120	3219	3284	3317
Lumens per foot (305mm)	780	805	821	829
Input Power (W), 4' rail length (1219mm)	26.2	26.2	26.2	26.2
Watts per foot (305mm)	6.6	6.6	6.6	6.6
CRI	95	95	95	95

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

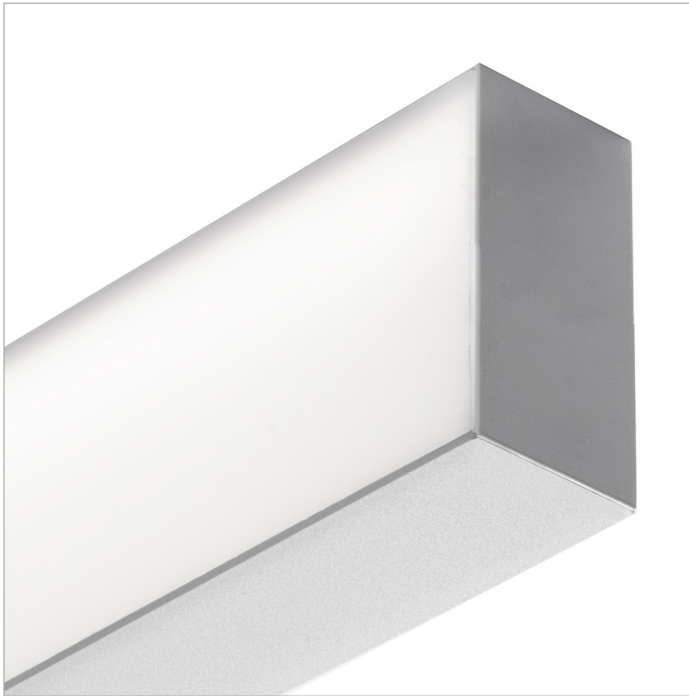

## IES Report

# ZipTwo® | 707 | Square 3572, Side Diffuse | 90 CRI | HO

707-Z2-4-48-XX-XX-X-0-Z-HO-359-H9-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	119	123	125	126
Total Lumens, 4' rail length (1219mm)	4680	4828	4927	4976
Lumens per foot (305mm)	1170	1207	1232	1244
Input Power (W), 4' rail length (1219mm)	39.6	39.6	39.6	39.6
Watts per foot (305mm)	9.9	9.9	9.9	9.9
CRI	95	95	95	95

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).