

IES Report

BoxRail® | 207 | 60° Symmetric, down | 80 CRI | HO

207-BX-XX-4-48-XX-XX-XX-X-X-Z-HO-35-S2-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	64	66	67	67
Total Lumens, 4' rail length (1219mm)	3271	3374	3443	3443
Lumens per foot (305mm)	818	843	861	861
Input Power (W), 4' rail length (1219mm)	51.6	51.6	51.6	51.6
Watts per foot (305mm)	12.9	12.9	12.9	12.9
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES INDOOR REPORT

PHOTOMETRIC FILENAME : VODE_207_BX_HO_35_S2.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] L022010908 (SOURCE REPORT FOR REFERENCE)

[TESTLAB] REPORT BASED ON DATA FROM NVLAP ACCREDITED LAB

[ISSUE DATE] 12/23/2019

[MANUFAC] Vode Lighting

[LUMCAT] 207-BX-48-Z-HO-35-S2

[LUMINAIRE] BoxRail LED, 48", 3500K, 80 CRI, zipper board,

[MORE] 60° symmetric lens down, high output, clear anodized finish

[TEST PROCEDURE] IESNA:LM-79-08

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	3437
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	67
Total Luminaire Watts	51.57
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.80
Spacing Criterion (90-270)	1.08
Spacing Criterion (Diagonal)	0.96
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.08 ft
Luminous Width (90-270)	4.00 ft
Luminous Height	0.09 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	8906	15873	43663
55	5341	9314	31970
65	3332	5427	22864
75	1648	2624	18183
85	306	578	8097

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_207_BX_HO_35_S2.IES

CANDELA TABULATION

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
0	2512.4	2512.4	2512.4	2512.4	2512.4	2512.4	2512.4	2512.4	2512.4	2512.4
5	2455.2	2453.0	2453.0	2453.0	2453.0	2453.0	2455.2	2455.2	2457.4	2459.6
10	2283.6	2281.4	2283.6	2288.0	2294.6	2303.4	2314.4	2323.2	2332.0	2345.2
15	2010.8	2010.8	2019.6	2030.6	2048.2	2063.6	2083.4	2109.8	2142.8	2173.6
20	1672.0	1672.0	1689.6	1709.4	1729.2	1760.0	1797.4	1837.0	1883.2	1925.0
25	1311.2	1317.8	1335.4	1357.4	1390.4	1427.8	1474.0	1529.0	1577.4	1634.6
30	985.6	994.4	1014.2	1036.2	1069.2	1106.6	1152.8	1207.8	1271.6	1333.2
35	726.0	732.6	748.0	774.4	800.8	833.8	873.4	928.4	983.4	1045.0
40	534.6	543.4	554.4	572.0	594.0	620.4	655.6	699.6	743.6	803.0
45	398.2	404.8	413.6	426.8	442.2	459.8	490.6	519.2	561.0	605.0
50	303.6	308.0	314.6	323.4	332.2	347.6	367.4	391.6	420.2	455.4
55	237.6	239.8	244.2	250.8	253.0	264.0	275.0	297.0	319.0	343.2
60	187.0	189.2	189.2	189.2	191.4	198.0	209.0	220.0	237.6	257.4
65	143.0	143.0	140.8	140.8	143.0	147.4	156.2	165.0	173.8	187.0
70	99.0	94.6	96.8	99.0	103.4	105.6	110.0	114.4	121.0	132.0
75	66.0	63.8	66.0	68.2	68.2	68.2	68.2	70.4	77.0	81.4
80	33.0	33.0	37.4	37.4	37.4	39.6	41.8	41.8	44.0	44.0
85	11.0	13.2	13.2	11.0	11.0	11.0	11.0	11.0	13.2	15.4
90	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	8.8	8.8

Vert. Angles **Horizontal Angles**

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>
0	2512.4	2512.4	2512.4	2512.4	2512.4	2512.4	2512.4	2512.4	2512.4
5	2464.0	2466.2	2470.6	2475.0	2479.4	2483.8	2488.2	2492.6	2499.2
10	2360.6	2378.2	2398.0	2402.4	2406.8	2413.4	2422.2	2431.0	2439.8
15	2200.0	2217.6	2241.8	2268.2	2299.0	2305.6	2312.2	2323.2	2336.4
20	1966.8	2008.6	2057.0	2083.4	2116.4	2153.8	2160.4	2169.2	2184.6
25	1696.2	1751.2	1801.8	1859.0	1894.2	1929.4	1958.0	1966.8	1988.8
30	1399.2	1467.4	1533.4	1586.2	1645.6	1678.6	1720.4	1727.0	1749.0
35	1115.4	1183.6	1251.8	1315.6	1368.4	1412.4	1449.8	1465.2	1480.6
40	858.0	917.4	979.0	1042.8	1097.8	1150.6	1179.2	1196.8	1205.6
45	655.6	706.2	756.8	809.6	860.2	897.6	915.2	928.4	939.4
50	492.8	539.0	583.0	624.8	666.6	695.2	717.2	734.8	745.8
55	374.0	402.6	435.6	468.6	501.6	525.8	543.4	556.6	563.2
60	279.4	299.2	325.6	347.6	369.6	389.4	404.8	411.4	415.8
65	202.4	220.0	237.6	253.0	268.4	281.6	292.6	299.2	301.4
70	143.0	156.2	167.2	180.4	189.2	198.0	204.6	209.0	211.2
75	90.2	96.8	107.8	116.6	123.2	127.6	136.4	143.0	151.8
80	46.2	50.6	55.0	59.4	63.8	68.2	70.4	70.4	72.6
85	15.4	15.4	17.6	19.8	22.0	22.0	24.2	26.4	26.4
90	8.8	6.6	6.6	6.6	4.4	4.4	4.4	4.4	2.2

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_207_BX_HO_35_S2.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	837.32	N.A.	24.40
0-30	1590.06	N.A.	46.30
0-40	2266.98	N.A.	66.00
0-60	3107.08	N.A.	90.40
0-80	3412.48	N.A.	99.30
0-90	3437.04	N.A.	100.00
10-90	3205.16	N.A.	93.30
20-40	1429.66	N.A.	41.60
20-50	1931.83	N.A.	56.20
40-70	1045.34	N.A.	30.40
60-80	305.40	N.A.	8.90
70-80	100.16	N.A.	2.90
80-90	24.56	N.A.	0.70
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	3437.04	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	231.88
10-20	605.44
20-30	752.74
30-40	676.92
40-50	502.17
50-60	337.93
60-70	205.24
70-80	100.16
80-90	24.56
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_207_BX_HO_35_S2.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	107	104	101	109	105	102	99	101	99	96	97	95	93	94	92	91	89
2	103	97	91	87	101	95	90	86	92	87	84	88	85	82	86	83	80	78
3	96	88	81	76	94	86	80	75	83	78	74	81	76	73	78	75	71	69
4	90	80	72	67	87	78	72	66	76	70	66	74	69	65	72	68	64	62
5	84	73	65	60	82	72	65	59	70	64	59	68	63	58	66	62	58	56
6	78	67	59	54	77	66	59	54	64	58	53	63	57	53	61	56	53	51
7	73	62	54	49	72	61	54	49	60	53	49	58	53	48	57	52	48	46
8	69	57	50	45	68	57	50	45	55	49	45	54	49	44	53	48	44	42
9	65	53	46	41	64	53	46	41	52	46	41	51	45	41	50	45	41	39
10	62	50	43	38	60	49	43	38	49	42	38	48	42	38	47	42	38	36

POLAR GRAPH

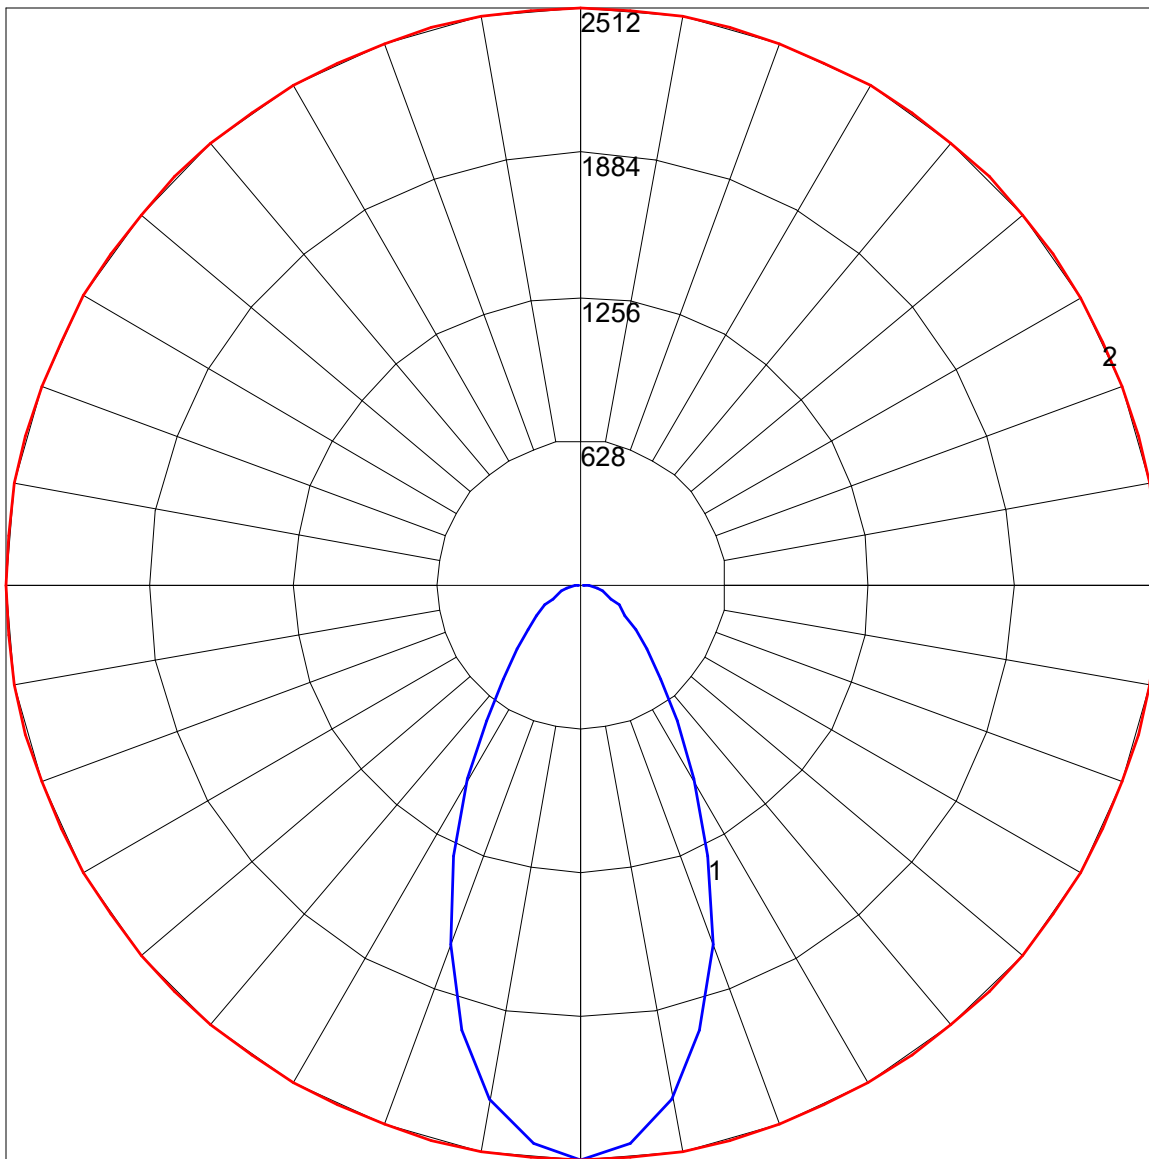

Maximum Candela = 2512.4 Located At Horizontal Angle = 0, Vertical Angle = 0
1 - Vertical Plane Through Horizontal Angles (0 - 180)
2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)