

## IES Report

# BoxRail® | 207 | 85° Asymmetric, down | 80 CRI | SO

207-BX-XX-4-48-XX-XX-XX-X-X-Z-SO-35-A1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	72	75	76	76
Total Lumens, 4' rail length (1219mm)	1815	1872	1910	1910
Lumens per foot (305mm)	454	468	478	478
Input Power (W), 4' rail length (1219mm)	25.3	25.3	25.3	25.3
Watts per foot (305mm)	6.4	6.4	6.4	6.4
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



## IES INDOOR REPORT

PHOTOMETRIC FILENAME : VODE\_207\_BX\_SO\_35\_A1.IES

### DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] L022010904 (SOURCE REPORT FOR REFERENCE)

[TESTLAB] REPORT BASED ON DATA FROM NVLAP ACCREDITED LAB

[ISSUE DATE] 12/23/2019

[MANUFAC] Vode Lighting

[LUMCAT] 207-BX-48-Z-SO-35-A1

[LUMINAIRE] BoxRail LED, 48", 3500K, 80 CRI, zipper board,

[MORE] 85° asymmetric lens down, standard output, clear anodized finish

[TEST PROCEDURE] IESNA:LM-79-08

### CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1910
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	76
Total Luminaire Watts	25.26
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.92
Spacing Criterion (90-270)	1.16
Spacing Criterion (Diagonal)	1.36
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.08 ft
Luminous Width (90-270)	4.00 ft
Luminous Height	0.09 ft

### LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	21507	22065	17631
55	14132	14986	14355
65	7433	8820	11439
75	1796	3814	8754
85	258	305	4269

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_207\_BX\_SO\_35\_A1.IES**

**CANDELA TABULATION**

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
<b>0</b>	764.44	764.44	764.44	764.44	764.44	764.44	764.44	764.44	764.44	764.44
<b>5</b>	959.32	958.16	958.16	950.04	944.24	937.28	929.16	918.72	908.28	895.52
<b>10</b>	1133.32	1132.16	1125.20	1117.08	1106.64	1093.88	1077.64	1057.92	1037.04	1013.84
<b>15</b>	1271.36	1269.04	1259.76	1249.32	1234.24	1214.52	1192.48	1168.12	1141.44	1111.28
<b>20</b>	1346.76	1343.28	1335.16	1323.56	1306.16	1286.44	1264.40	1237.72	1211.04	1171.60
<b>25</b>	1363.00	1358.36	1352.56	1339.80	1324.72	1306.16	1284.12	1263.24	1222.64	1180.88
<b>30</b>	1320.08	1315.44	1309.64	1299.20	1286.44	1271.36	1255.12	1224.96	1190.16	1153.04
<b>35</b>	1233.08	1228.44	1222.64	1215.68	1202.92	1189.00	1172.76	1143.76	1118.24	1082.28
<b>40</b>	1108.96	1105.48	1100.84	1093.88	1084.60	1071.84	1052.12	1031.24	1006.88	973.24
<b>45</b>	961.64	959.32	954.68	948.88	939.60	929.16	911.76	896.68	867.68	841.00
<b>50</b>	795.76	794.60	791.12	787.64	781.84	772.56	759.80	741.24	719.20	692.52
<b>55</b>	628.72	626.40	627.56	625.24	620.60	614.80	605.52	588.12	571.88	552.16
<b>60</b>	466.32	466.32	467.48	468.64	467.48	462.84	457.04	447.76	433.84	419.92
<b>65</b>	319.00	321.32	323.64	324.80	325.96	325.96	323.64	320.16	313.20	303.92
<b>70</b>	185.60	187.92	192.56	196.04	200.68	204.16	206.48	208.80	206.48	203.00
<b>75</b>	71.92	76.56	83.52	87.00	92.80	102.08	107.88	112.52	116.00	118.32
<b>80</b>	11.60	18.56	16.24	18.56	20.88	24.36	27.84	33.64	38.28	45.24
<b>85</b>	9.28	9.28	9.28	9.28	9.28	8.12	8.12	6.96	6.96	8.12
<b>90</b>	10.44	10.44	10.44	10.44	9.28	9.28	9.28	8.12	8.12	6.96

**Vert. Angles**      **Horizontal Angles**

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>	<u>95</u>
<b>0</b>	764.44	764.44	764.44	764.44	764.44	764.44	764.44	764.44	764.44	764.44
<b>5</b>	882.76	868.84	854.92	838.68	823.60	807.36	789.96	773.72	756.32	741.24
<b>10</b>	988.32	962.80	936.12	904.80	872.32	839.84	807.36	773.72	740.08	708.76
<b>15</b>	1076.48	1035.88	994.12	951.20	908.28	860.72	812.00	764.44	715.72	671.64
<b>20</b>	1127.52	1079.96	1031.24	973.24	914.08	857.24	795.76	735.44	676.28	619.44
<b>25</b>	1140.28	1089.24	1030.08	973.24	905.96	839.84	772.56	702.96	634.52	569.56
<b>30</b>	1108.96	1060.24	1006.88	939.60	875.80	801.56	730.80	654.24	580.00	512.72
<b>35</b>	1039.36	995.28	937.28	876.96	808.52	738.92	668.16	592.76	519.68	451.24
<b>40</b>	936.12	888.56	838.68	783.00	718.04	654.24	584.64	517.36	451.24	388.60
<b>45</b>	802.72	763.28	721.52	669.32	615.96	559.12	497.64	438.48	379.32	325.96
<b>50</b>	665.84	631.04	592.76	553.32	509.24	459.36	402.52	349.16	313.20	267.96
<b>55</b>	527.80	498.80	466.32	432.68	395.56	363.08	328.28	291.16	252.88	218.08
<b>60</b>	400.20	368.88	345.68	327.12	307.40	284.20	256.36	226.20	199.52	171.68
<b>65</b>	292.32	279.56	265.64	249.40	232.00	212.28	193.72	170.52	150.80	132.24
<b>70</b>	197.20	190.24	183.28	174.00	162.40	150.80	138.04	122.96	110.20	100.92
<b>75</b>	118.32	117.16	118.32	114.84	107.88	102.08	92.80	80.04	73.08	66.12
<b>80</b>	49.88	53.36	58.00	55.68	53.36	51.04	47.56	42.92	39.44	37.12
<b>85</b>	10.44	10.44	10.44	12.76	13.92	15.08	15.08	15.08	13.92	13.92
<b>90</b>	5.80	5.80	4.64	3.48	3.48	3.48	2.32	2.32	2.32	2.32

**Vert. Angles**      **Horizontal Angles**

	<u>100</u>	<u>105</u>	<u>110</u>	<u>115</u>	<u>120</u>	<u>125</u>	<u>130</u>	<u>135</u>	<u>140</u>	<u>145</u>
<b>0</b>	764.44	764.44	764.44	764.44	764.44	764.44	764.44	764.44	764.44	764.44
<b>5</b>	725.00	708.76	693.68	678.60	664.68	651.92	639.16	627.56	617.12	607.84
<b>10</b>	678.60	648.44	618.28	590.44	563.76	541.72	522.00	503.44	486.04	470.96
<b>15</b>	627.56	583.48	545.20	509.24	476.76	445.44	416.44	394.40	377.00	361.92
<b>20</b>	564.92	515.04	469.80	429.20	388.60	361.92	337.56	313.20	292.32	278.40
<b>25</b>	506.92	452.40	403.68	358.44	324.80	293.48	269.12	250.56	233.16	219.24
<b>30</b>	446.60	393.24	342.20	303.92	267.96	242.44	220.40	201.84	190.24	179.80
<b>35</b>	388.60	336.40	291.16	252.88	223.88	200.68	183.28	169.36	158.92	151.96

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_207\_BX\_SO\_35\_A1.IES**

**CANDELA TABULATION - (Cont.)**

<b>40</b>	331.76	281.88	244.76	212.28	187.92	169.36	155.44	146.16	138.04	132.24
<b>45</b>	278.40	235.48	204.16	178.64	157.76	143.84	134.56	126.44	121.80	117.16
<b>50</b>	229.68	197.20	169.36	149.64	135.72	124.12	116.00	111.36	106.72	104.40
<b>55</b>	186.76	161.24	141.52	125.28	113.68	106.72	100.92	97.44	93.96	91.64
<b>60</b>	149.64	131.08	116.00	104.40	95.12	89.32	85.84	82.36	78.88	77.72
<b>65</b>	116.00	103.24	92.80	83.52	77.72	73.08	69.60	67.28	66.12	64.96
<b>70</b>	87.00	77.72	69.60	63.80	60.32	58.00	55.68	53.36	52.20	51.04
<b>75</b>	59.16	52.20	47.56	45.24	44.08	40.60	38.28	35.96	33.64	31.32
<b>80</b>	32.48	29.00	29.00	26.68	24.36	22.04	19.72	18.56	18.56	19.72
<b>85</b>	12.76	10.44	10.44	10.44	9.28	8.12	8.12	8.12	8.12	9.28
<b>90</b>	1.16	2.32	2.32	2.32	2.32	2.32	2.32	2.32	2.32	2.32

**Vert. Angles**      **Horizontal Angles**

	<u><b>150</b></u>	<u><b>155</b></u>	<u><b>160</b></u>	<u><b>165</b></u>	<u><b>170</b></u>	<u><b>175</b></u>	<u><b>180</b></u>
<b>0</b>	764.44	764.44	764.44	764.44	764.44	764.44	764.44
<b>5</b>	598.56	591.60	585.80	581.16	578.84	576.52	576.52
<b>10</b>	458.20	446.60	436.16	429.20	423.40	421.08	419.92
<b>15</b>	348.00	335.24	325.96	317.84	312.04	308.56	308.56
<b>20</b>	266.80	256.36	248.24	241.28	235.48	233.16	232.00
<b>25</b>	209.96	203.00	196.04	191.40	186.76	184.44	184.44
<b>30</b>	171.68	167.04	162.40	158.92	156.60	155.44	154.28
<b>35</b>	146.16	142.68	140.36	138.04	135.72	135.72	135.72
<b>40</b>	128.76	125.28	124.12	122.96	122.96	121.80	121.80
<b>45</b>	114.84	112.52	112.52	112.52	112.52	112.52	112.52
<b>50</b>	103.24	102.08	102.08	102.08	103.24	103.24	103.24
<b>55</b>	90.48	90.48	91.64	92.80	93.96	93.96	93.96
<b>60</b>	76.56	76.56	77.72	78.88	82.36	84.68	84.68
<b>65</b>	63.80	63.80	63.80	64.96	66.12	71.92	73.08
<b>70</b>	51.04	51.04	51.04	49.88	47.56	51.04	55.68
<b>75</b>	31.32	31.32	31.32	33.64	33.64	30.16	35.96
<b>80</b>	19.72	20.88	22.04	23.20	24.36	23.20	24.36
<b>85</b>	9.28	10.44	10.44	11.60	11.60	11.60	12.76
<b>90</b>	2.32	2.32	2.32	2.32	2.32	2.32	1.16

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_207\_BX\_SO\_35\_A1.IES**

**ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	285.05	N.A.	14.90
0-30	611.16	N.A.	32.00
0-40	993.34	N.A.	52.00
0-60	1638.2	N.A.	85.70
0-80	1895.05	N.A.	99.20
0-90	1910.47	N.A.	100.00
10-90	1837.83	N.A.	96.20
20-40	708.29	N.A.	37.10
20-50	1070.58	N.A.	56.00
40-70	823.88	N.A.	43.10
60-80	256.85	N.A.	13.40
70-80	77.83	N.A.	4.10
80-90	15.42	N.A.	0.80
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	1910.47	N.A.	100.00

Total Luminaire Efficiency = N.A. %

**ZONAL LUMEN SUMMARY**

Zone	Lumens
0-10	72.65
10-20	212.41
20-30	326.10
30-40	382.19
40-50	362.29
50-60	282.57
60-70	179.02
70-80	77.83
80-90	15.42
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_207\_BX\_SO\_35\_A1.IES**

**COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD**

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	88	86
2	101	93	87	82	98	92	86	81	88	83	79	85	81	77	82	79	76	74
3	93	83	75	69	90	81	74	69	78	72	68	76	71	66	73	69	65	63
4	85	74	66	60	83	73	65	59	70	64	58	68	62	58	66	61	57	55
5	79	67	58	52	77	65	57	52	63	56	51	61	55	50	60	54	50	48
6	73	60	52	46	71	59	51	45	57	50	45	56	49	45	54	49	44	42
7	68	55	46	40	66	54	46	40	52	45	40	51	45	40	50	44	39	38
8	63	50	42	36	62	49	42	36	48	41	36	47	40	36	46	40	36	34
9	59	46	38	33	58	45	38	33	44	37	33	43	37	32	42	36	32	30
10	55	43	35	30	54	42	35	30	41	34	30	40	34	29	39	34	29	28

POLAR GRAPH

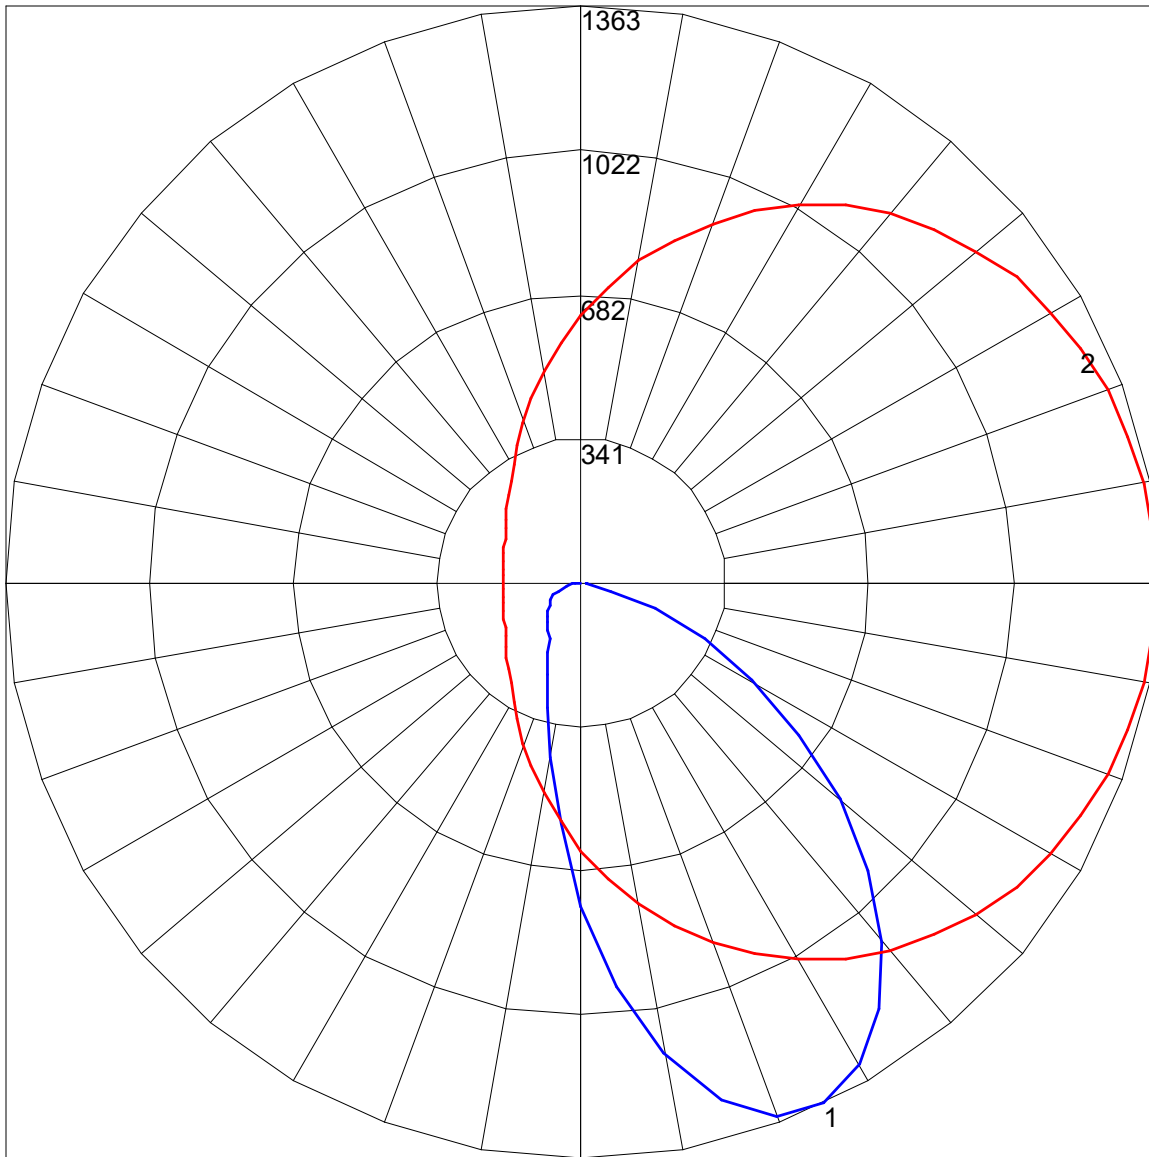

Maximum Candela = 1363 Located At Horizontal Angle = 0, Vertical Angle = 25  
# 1 - Vertical Plane Through Horizontal Angles (0 - 180)  
# 2 - Horizontal Cone Through Vertical Angle (25) (Through Max. Cd.)