

IES Report




BoxRail[®] | 207 | Wide Batwing, up | 85° Asymmetric, down | 80 CRI | LO

207-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-35-G1A1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	84	87	88	88
Total Lumens, 4' rail length (1219mm)	2401	2476	2527	2527
Lumens per foot (305mm)	600	619	632	632
Lumens per foot UP (305mm)	373	385	393	393
Lumens per foot DOWN (305mm)	227	234	239	239
Input Power (W), 4' rail length (1219mm)	28.8	28.8	28.8	28.8
Watts per foot (305mm)	7.2	7.2	7.2	7.2
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

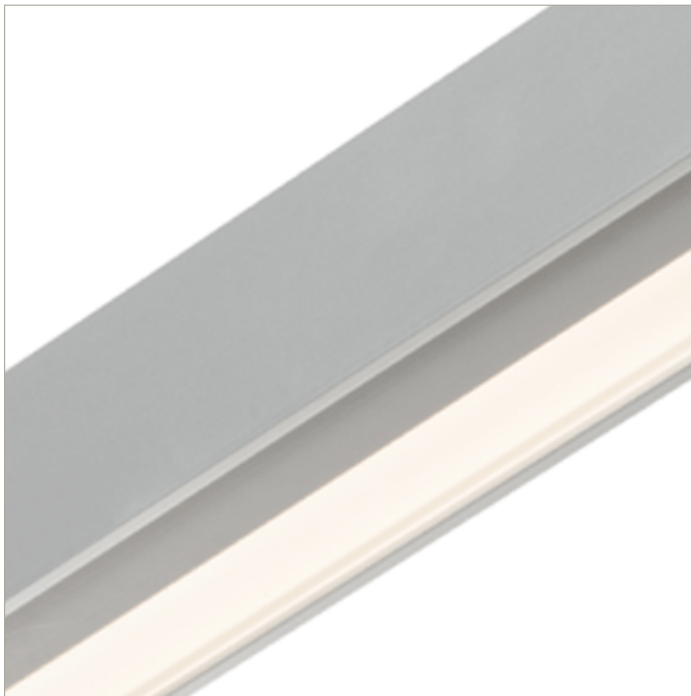

IES Report




BoxRail[®] | 207 | Wide Batwing, up | 85° Asymmetric, down | 80 CRI | SO

207-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-35-G1A1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	96	99	101	101
Total Lumens, 4' rail length (1219mm)	4801	4953	5054	5054
Lumens per foot (305mm)	1200	1238	1263	1263
Lumens per foot UP (305mm)	747	770	786	786
Lumens per foot DOWN (305mm)	454	468	478	478
Input Power (W), 4' rail length (1219mm)	50.5	50.5	50.5	50.5
Watts per foot (305mm)	12.7	12.7	12.7	12.7
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

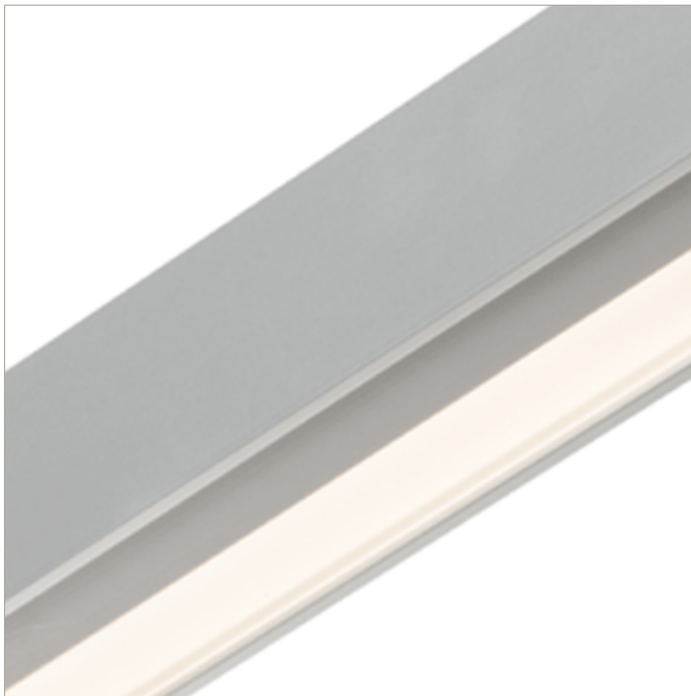

IES Report




BoxRail® | 207 | Wide Batwing, up | 85° Asymmetric, down | 80 CRI | HO

207-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-35-G1A1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	89	92	94	94
Total Lumens, 4' rail length (1219mm)	9122	9410	9602	9602
Lumens per foot (305mm)	2281	2353	2401	2401
Lumens per foot UP (305mm)	1418	1463	1493	1493
Lumens per foot DOWN (305mm)	862	889	907	907
Input Power (W), 4' rail length (1219mm)	103.1	103.1	103.1	103.1
Watts per foot (305mm)	25.8	25.8	25.8	25.8
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

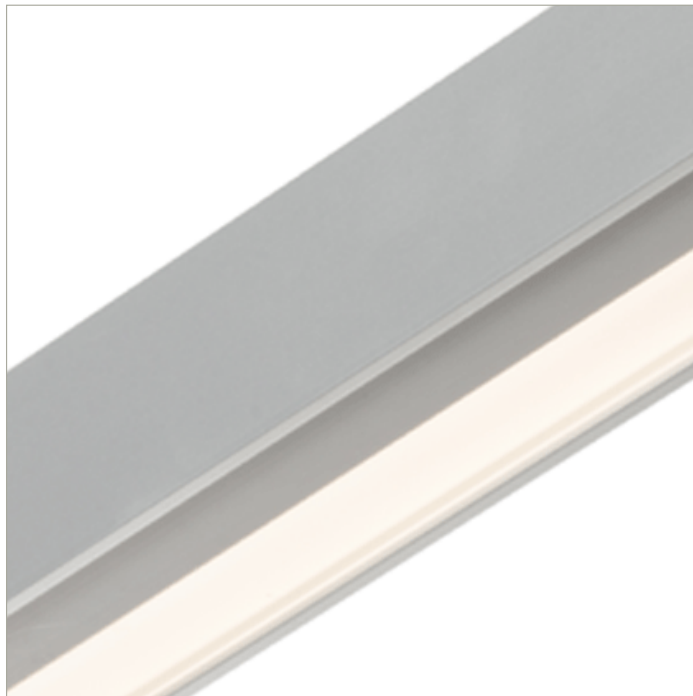

IES Report




BoxRail® | 207 | Wide Batwing, up | 85° Asymmetric, down | 90 CRI | LO

207-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-359-G1A1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	72	75	76	77
Total Lumens, 4' rail length (1219mm)	2069	2135	2178	2200
Lumens per foot (305mm)	517	534	545	550
Lumens per foot UP (305mm)	322	332	339	342
Lumens per foot DOWN (305mm)	196	202	206	208
Input Power (W), 4' rail length (1219mm)	28.8	28.8	28.8	28.8
Watts per foot (305mm)	7.2	7.2	7.2	7.2
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

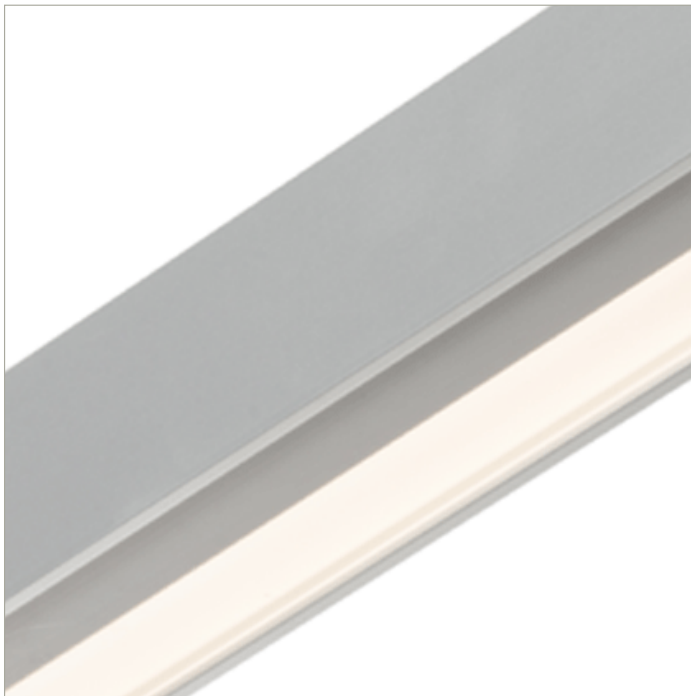

IES Report




BoxRail[®] | 207 | Wide Batwing, up | 85° Asymmetric, down | 90 CRI | SO

207-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-359-G1A1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	82	85	87	88
Total Lumens, 4' rail length (1219mm)	4139	4270	4357	4400
Lumens per foot (305mm)	1035	1067	1089	1100
Lumens per foot UP (305mm)	644	664	677	684
Lumens per foot DOWN (305mm)	391	404	412	416
Input Power (W), 4' rail length (1219mm)	50.5	50.5	50.4	50.5
Watts per foot (305mm)	12.7	12.7	12.6	12.7
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

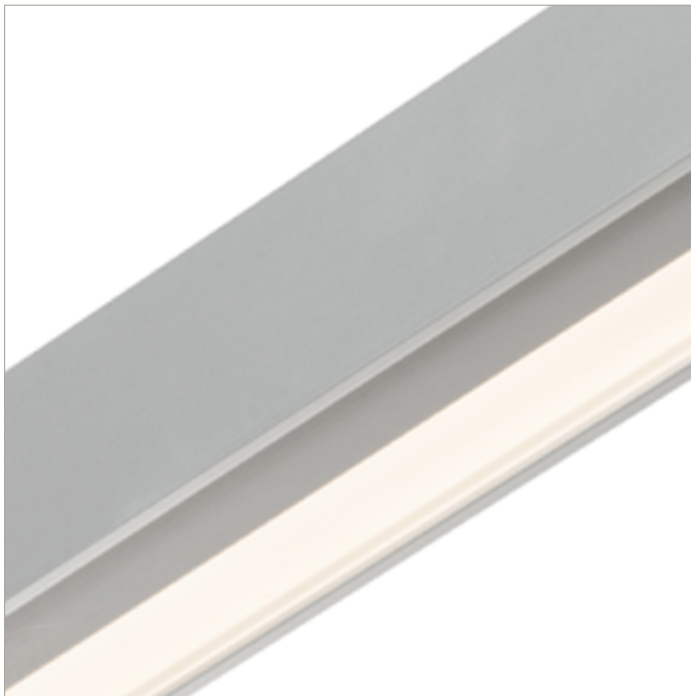

IES Report

BoxRail® | 207 | Wide Batwing, up | 85° Asymmetric, down | 90 CRI | HO

207-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-359-G1A1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	77	79	81	82
Total Lumens, 4' rail length (1219mm)	7864	8112	8278	8361
Lumens per foot (305mm)	1966	2028	2069	2090
Lumens per foot UP (305mm)	1223	1261	1287	1300
Lumens per foot DOWN (305mm)	743	767	782	790
Input Power (W), 4' rail length (1219mm)	103.1	103.1	103.1	103.1
Watts per foot (305mm)	25.8	25.8	25.8	25.8
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).