



## IES Report

# ZipTwo® | 707 | Micro 3508, 120° Symmetric | 90 CRI | LO

707-Z2-4-48-XX-XX-X-0-Z-LO-359-S3-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	99	103	105	106
Total Lumens, 4' rail length (1219mm)	1473	1519	1550	1566
Lumens per foot (305mm)	368	380	388	391
Input Power (W), 4' rail length (1219mm)	14.9	14.9	14.9	14.9
Watts per foot (305mm)	3.8	3.8	3.8	3.8
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



## IES INDOOR REPORT

PHOTOMETRIC FILENAME : VODE\_707\_Z2\_LO\_359\_S3.IES

### DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] L121911526 (SOURCE REPORT FOR REFERENCE)

[TESTLAB] REPORT BASED ON DATA FROM NVLAP ACCREDITED LAB

[ISSUE DATE] 12/23/2019

[MANUFAC] Vode Lighting

[LUMCAT] 707-Z2-48-Z-LO-359-S3-AL

[LUMINAIRE] ZipTwo LED, 48", 3500K, 90 CRI, zipper board, micro 3508, 120° symmetric lens,

[MORE] low output, clear anodized finish

[TEST PROCEDURE] IESNA:LM-79-08

### CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1550
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	104
Total Luminaire Watts	14.89
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.66
Spacing Criterion (90-270)	1.18
Spacing Criterion (Diagonal)	1.56
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.07 ft
Luminous Width (90-270)	3.97 ft
Luminous Height	0.00 ft

### LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	25967	22656	15542
55	23748	21522	14977
65	18679	17947	13780
75	12111	12111	10615
85	7548	6882	5550

IES INDOOR REPORT  
PHOTOMETRIC FILENAME : VODE\_707\_Z2\_LO\_359\_S3.IES

CANDELA TABULATION

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
<b>0</b>	474.5	474.5	474.5	474.5	474.5	474.5	474.5	474.5	474.5	474.5
<b>5</b>	478.5	478.5	478.5	478.0	478.0	477.5	476.5	476.5	475.5	475.0
<b>10</b>	493.5	493.5	492.5	491.0	490.0	488.0	486.0	483.5	481.0	478.5
<b>15</b>	515.5	515.0	514.0	511.5	508.0	504.0	499.5	494.0	488.5	482.5
<b>20</b>	538.5	538.0	535.5	532.0	527.5	521.0	513.5	505.0	496.0	486.0
<b>25</b>	554.5	553.5	551.0	547.0	540.5	532.5	523.5	512.5	500.0	487.0
<b>30</b>	557.0	556.5	554.0	549.5	543.5	535.0	524.5	512.5	498.0	482.0
<b>35</b>	545.0	544.5	542.0	538.0	532.0	524.0	514.0	501.5	486.5	469.5
<b>40</b>	517.0	516.5	514.5	511.0	506.5	499.5	490.5	479.0	464.0	447.0
<b>45</b>	474.5	474.0	472.5	470.0	466.5	461.0	453.5	443.5	430.5	414.0
<b>50</b>	418.5	418.5	418.0	416.5	414.0	410.0	404.5	396.5	385.5	371.0
<b>55</b>	352.0	352.0	351.5	351.5	350.0	348.0	344.5	339.0	330.5	319.0
<b>60</b>	278.5	278.5	279.0	279.0	279.0	278.5	276.5	273.0	267.5	259.5
<b>65</b>	204.0	204.0	204.5	205.0	206.0	206.0	205.5	204.0	201.0	196.0
<b>70</b>	135.5	136.0	136.5	137.0	137.5	138.5	138.5	138.0	136.5	134.0
<b>75</b>	81.0	81.5	81.5	82.0	82.5	82.5	83.0	82.5	82.0	81.0
<b>80</b>	43.0	43.0	43.0	43.5	43.5	43.5	43.5	43.0	42.5	42.0
<b>85</b>	17.0	17.0	17.0	17.0	17.0	17.0	16.5	16.5	16.0	15.5
<b>90</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Vert. Horizontal Angles

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>
<b>0</b>	474.5	474.5	474.5	474.5	474.5	474.5	474.5	474.5	474.5
<b>5</b>	475.0	474.0	473.5	473.0	472.5	472.5	472.0	472.0	472.0
<b>10</b>	475.5	473.0	470.5	468.5	466.0	465.0	463.5	463.0	462.5
<b>15</b>	476.0	470.5	465.0	460.0	455.5	452.0	449.5	448.0	447.5
<b>20</b>	476.0	466.0	456.5	448.0	440.5	434.5	430.0	427.5	426.5
<b>25</b>	472.5	458.5	445.0	432.0	422.0	413.0	406.5	403.0	401.5
<b>30</b>	464.5	447.0	429.5	413.0	399.5	388.0	380.0	375.5	374.0
<b>35</b>	449.5	429.5	409.5	390.0	374.0	361.0	351.5	346.0	344.5
<b>40</b>	427.0	405.5	384.0	363.5	346.0	332.0	322.0	316.5	314.5
<b>45</b>	395.0	374.0	352.5	332.0	315.0	301.0	291.5	286.0	284.0
<b>50</b>	354.0	335.0	315.0	296.5	281.0	268.5	260.0	255.0	253.5
<b>55</b>	304.5	288.5	272.0	256.5	244.0	234.0	227.0	223.0	222.0
<b>60</b>	248.5	236.5	224.0	212.5	203.5	196.5	191.5	188.5	187.5
<b>65</b>	189.0	181.5	173.5	166.5	160.5	156.0	153.0	151.5	150.5
<b>70</b>	130.5	126.5	122.5	119.0	116.0	113.5	112.0	111.5	111.0
<b>75</b>	79.5	77.5	76.0	74.0	73.0	72.0	71.5	71.0	71.0
<b>80</b>	41.0	40.0	39.5	38.5	38.0	37.5	37.0	37.0	37.0
<b>85</b>	15.0	14.5	14.0	13.5	13.0	13.0	12.5	12.5	12.5
<b>90</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_707\_Z2\_LO\_359\_S3.IES**

**ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	182.04	N.A.	11.70
0-30	404.29	N.A.	26.10
0-40	688.95	N.A.	44.40
0-60	1260.92	N.A.	81.30
0-80	1530.83	N.A.	98.80
0-90	1550.19	N.A.	100.00
10-90	1504.73	N.A.	97.10
20-40	506.91	N.A.	32.70
20-50	810.65	N.A.	52.30
40-70	756.03	N.A.	48.80
60-80	269.91	N.A.	17.40
70-80	85.85	N.A.	5.50
80-90	19.36	N.A.	1.20
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	1550.19	N.A.	100.00

Total Luminaire Efficiency = N.A. %

**ZONAL LUMEN SUMMARY**

Zone	Lumens
0-10	45.46
10-20	136.58
20-30	222.25
30-40	284.66
40-50	303.74
50-60	268.23
60-70	184.06
70-80	85.85
80-90	19.36
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_707\_Z2\_LO\_359\_S3.IES**

**COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD**

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	105	100	97	106	102	98	95	98	95	92	94	92	89	91	88	87	85
2	99	91	85	79	97	89	83	78	86	81	76	83	78	74	79	76	73	71
3	90	80	72	65	88	78	71	65	75	69	64	73	67	63	70	66	62	59
4	83	71	62	55	80	69	61	55	67	60	54	65	58	53	62	57	53	51
5	76	63	54	47	74	62	53	47	60	52	47	58	51	46	56	50	46	43
6	70	57	48	41	68	56	47	41	54	46	41	52	45	40	51	45	40	38
7	65	51	42	36	63	50	42	36	49	41	36	47	41	35	46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32	43	37	32	42	36	31	29
9	56	43	34	29	55	42	34	29	41	34	28	40	33	28	39	33	28	26
10	53	39	31	26	51	39	31	26	38	31	26	37	30	26	36	30	25	24

POLAR GRAPH

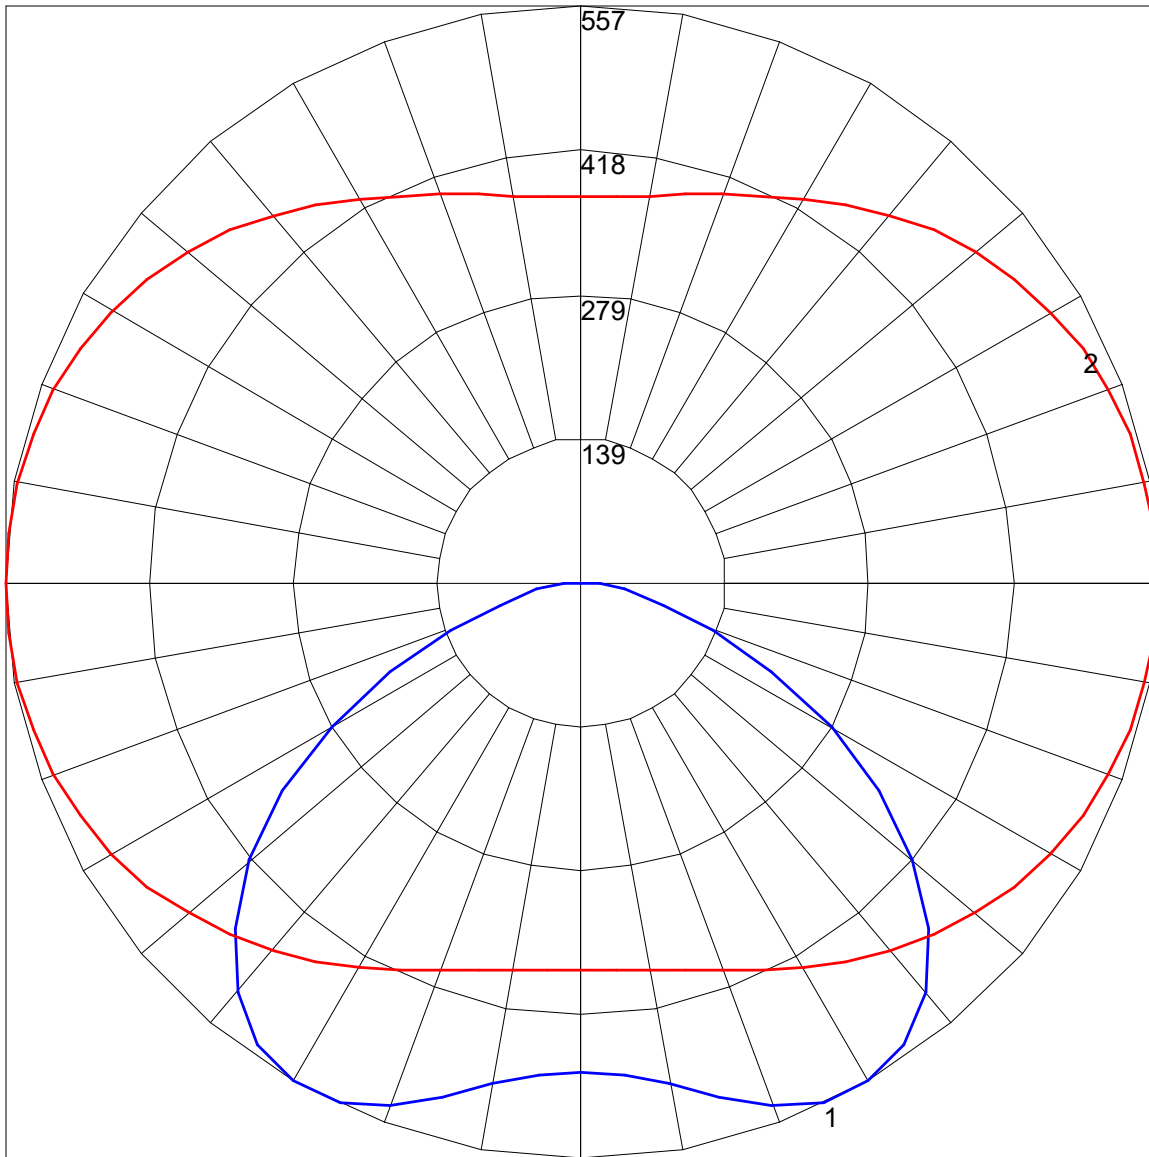

Maximum Candela = 557 Located At Horizontal Angle = 0, Vertical Angle = 30  
# 1 - Vertical Plane Through Horizontal Angles (0 - 180)  
# 2 - Horizontal Cone Through Vertical Angle (30) (Through Max. Cd.)